
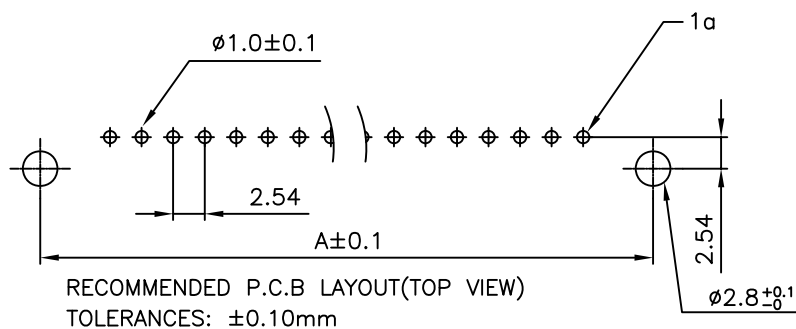

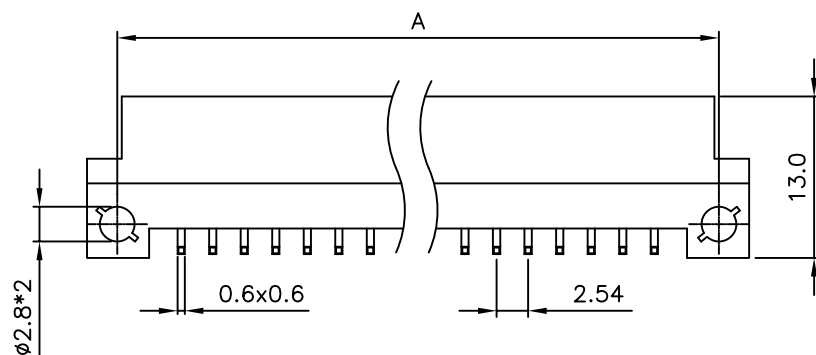


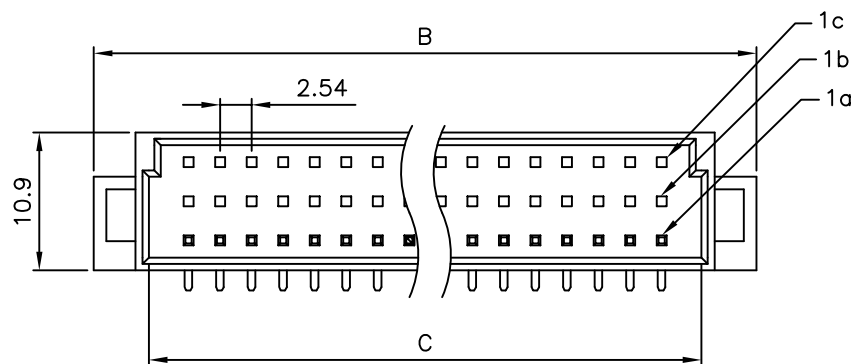

#### SPECIFICATION

##### MATERIAL

Insulator: PBT & glass fiber , rated UL94V-0

Contacts: Brass

##### CONTACT PLATING

S=1u" gold on mating length, 100u" tin on solder  
tails base nickel=40u"

G=gold flash

A=5u" gold(selective)

B=10u" gold(selective)

C=15u" gold(selective)

D=30u" gold(selective)

#### NOTE:

| PART NO.   | A     | B  | C    |
|------------|-------|----|------|
| UC-PR-1X32 | 88.90 | 94 | 85.5 |
| UC-PR-1X16 | 48.26 | 54 | 44.6 |

#### RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X,  $\pm$

.X,  $\pm$

.XX,  $\pm$

.XXX,  $\pm$

ANG,  $\pm$

PPOJECTION

照片框

#### ORDER INFORMATION

UC-PR-1Xxx-LF  
SERIES | LEADFREE  
1X16:16 WAY  
1X32:32 WAY  
DIP 90°  
MALE

DESCRIPTION: DIN 41612 ( THREE ROW ) MALE 64PIN & 32PIN