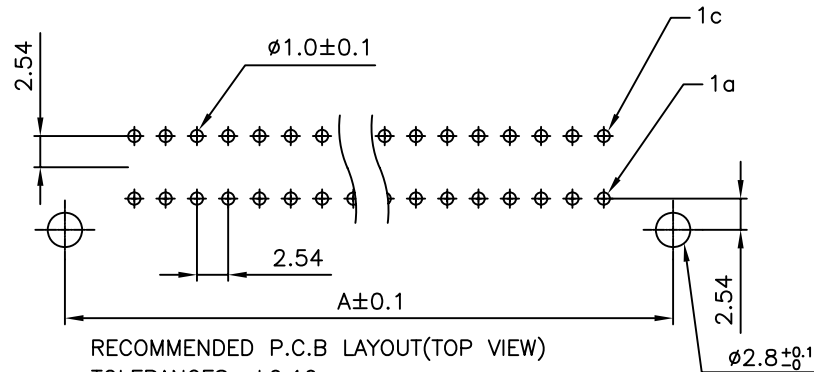
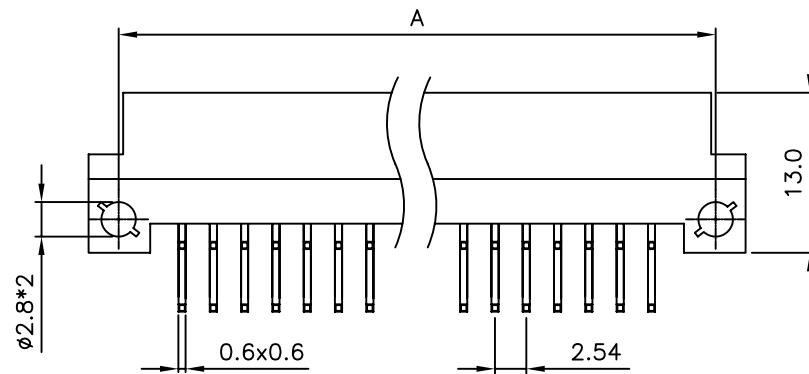
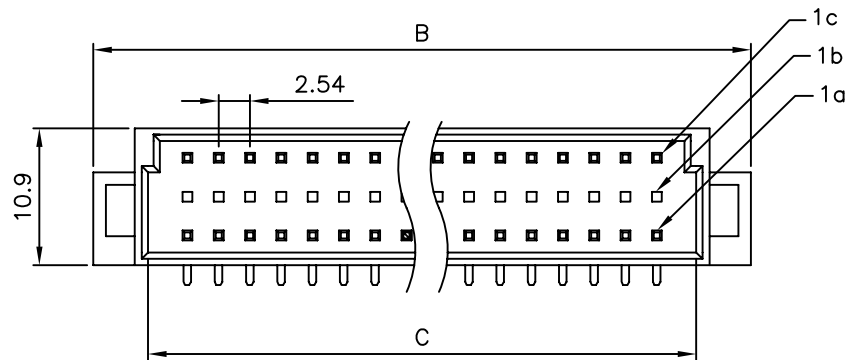


SPECIFICATION

MATERIAL

Insulator: PBT & glass fiber , rated UL94V-0

Contacts: Brass

CONTACT PLATING

S=1u" gold on mating length, 100u" tin on solder
tails base nickel=40u"

G=gold flash

A=5u" gold(selective)

B=10u" gold(selective)

C=15u" gold(selective)

D=30u" gold(selective)

NOTE:

PART NO.	A	B	C
UC-PR-2X32	88.90	94	85.5
UC-PR-2X16	48.26	54	44.6

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$

.X, $\pm$

.XX, $\pm$

.XXX, $\pm$

ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

UC-PR-2Xxx-LF
SERIES | LEADFREE
2X16:32 WAY
2X32:64 WAY
DIP 90°
MALE

DESCRIPTION: DIN 41612 (THREE ROW) MALE 64PIN & 32PIN