
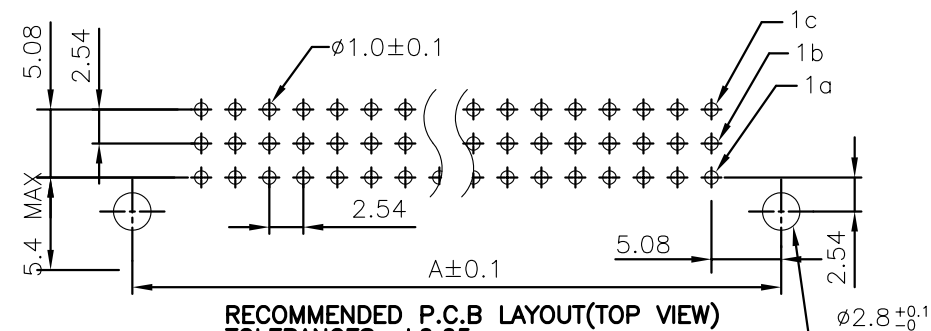
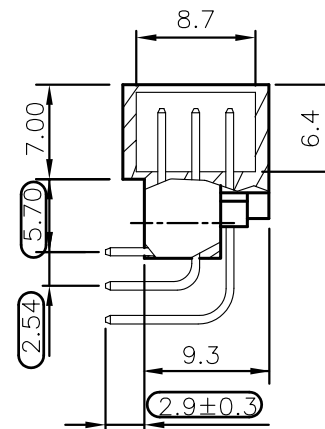
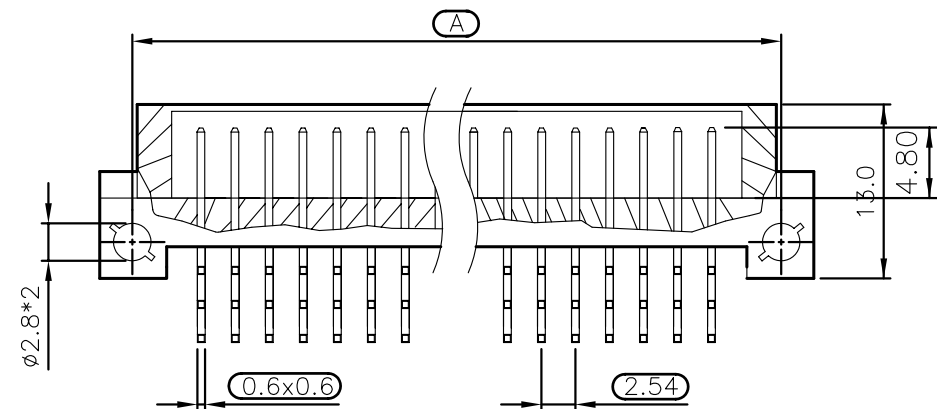


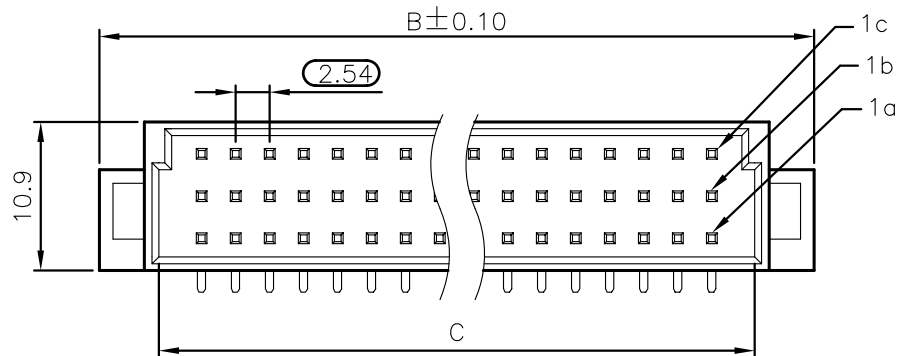

RECOMMENDED P.C.B LAYOUT(TOP VIEW)
TOLERANCES: $\pm 0.05\text{mm}$

SPECIFICATION

MATERIAL

Insulator: Thermal Plastic UL94V-0

Contacts: Copper Alloy

Rivet, Boardlock: Copper Alloy

CONTACT PLATING

Underplate: 50u"~100u" Nickel

Contact Area: 1u"~30u" Selective Gold

Solder Tails Area: 100u"~200u" Tin(Lead Free)

ELECTRICAL

Operation Voltage: 250 VAC Max.

Current Rating:

TEMP(°C)	20	70	100
CURRENT	2.0A	1.6A	1.0A

Contact Resistance: 20 Mohms Max.

Insulation Resistance: 3000 Mohms Min @ 500 VDC

Dielectric Withstanding Voltage: 1000 VAC / Minute

Temperature Range: -55°C TO +125°C

NOTE:

PART NO.	A	B	C
UC-PR-3X32	88.90	94.00	85.50
UC-PR-3X16	48.26	53.36	44.60

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

照片框

ORDER INFORMATION

UC-PR-3Xxx-LF
SERIES | LEADFREE
3X16:48 WAY
3X32:96 WAY
DIP 90°
MALE

DESCRIPTION: