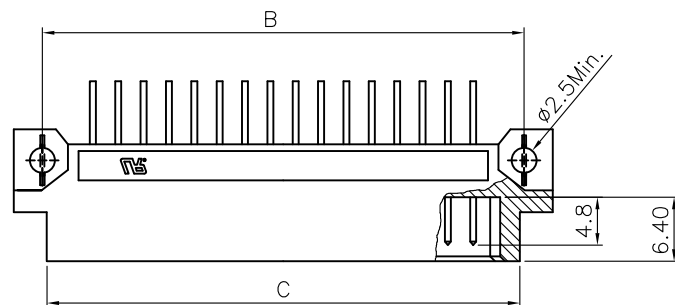


Material:

Housing: Thermoplastic Polyester Glass Filled UL94V-0.

Contacts: Copper Alloy.

Lock: Copper Alloy.

Electrical Characteristics:

Current Rating: 2 AMP.




Dielectric Withstanding Voltage: AC 1000V For 1 minute.

Insulator Resistance: 1000MΩ min. at DC 500V.

Contact Resistance: 20mΩ max. at DC 100mA.

Operating Temperature: -55°C~+125°C .

***RoHS Compliant**

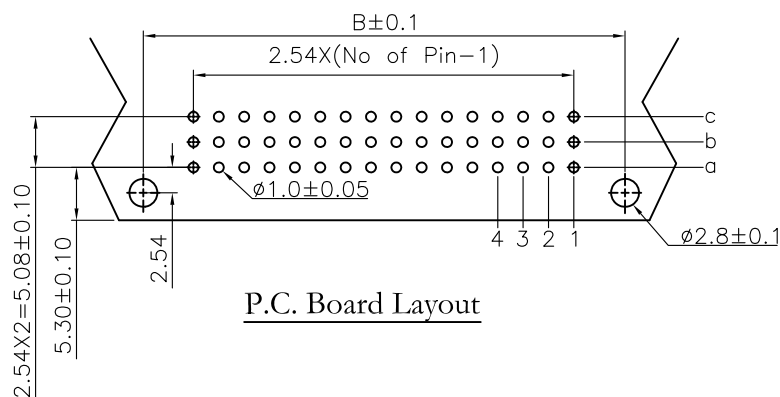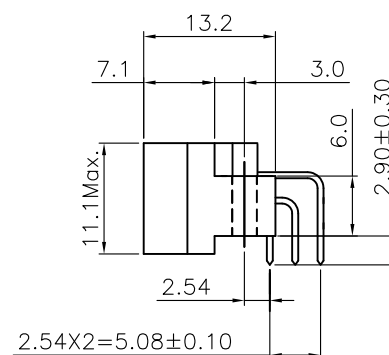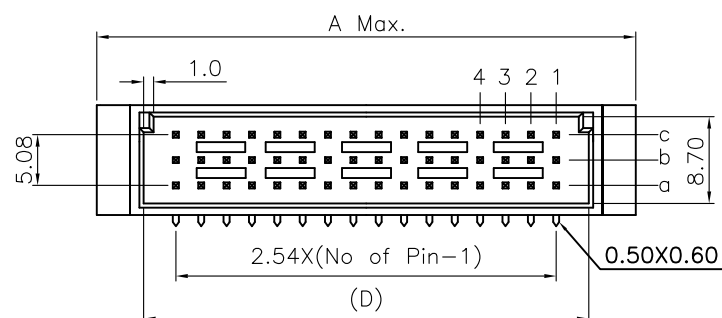

P.C. Board Layout

Dimension				
Position	A	B	C	D
48/32/16	54.00	48.26	47.40	44.60
30/20/10	38.10	33.02	32.16	29.36
Pitch	Position	Rows with Contacts	Contact Arrange	P/N
2.54mm	48	a b c		UC-PR-3X16
	32	a - c		UC-PR-2X16
	30	a b c		UC-PR-3X10
	20	a - c		UC-PR-2X10
	16	a - -		UC-PR-1X16
	10	a - -		UC-PR-1X10

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

X. ± 0.50

CHECKED BY GENIUS

.X ± 0.25

UNIT / mm

SCALE 1 : 1

.XX ± 0.15

DATE

.XXX ±

ANG ±

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

UC-PR-xXxx-LF
SERIES LEADFREE
3X16:48WAY
1X10:10WAY
DIP 90°
MALE

DESCRIPTION: