

DIN 41612 EUROCARD CONNECTORS

Right Angle Male Type Half C Connectors

Technical data

EURO DIN 41612:

Housing:

Contact:

Plating:

Signal

PBT & 30%Glass Fiber(UL94V-0)

Male : Brass

2U" Au plated on contact area,

Tin-plated on tail

Operating temperature:

-55°C~+105°C

Contact resistance:

20m(ohm)max.

Insulator resistance:


10⁹ M(ohm)min.

Current rating:


2 AMP

Withstanding voltage:

AC 1000V for 1 minute

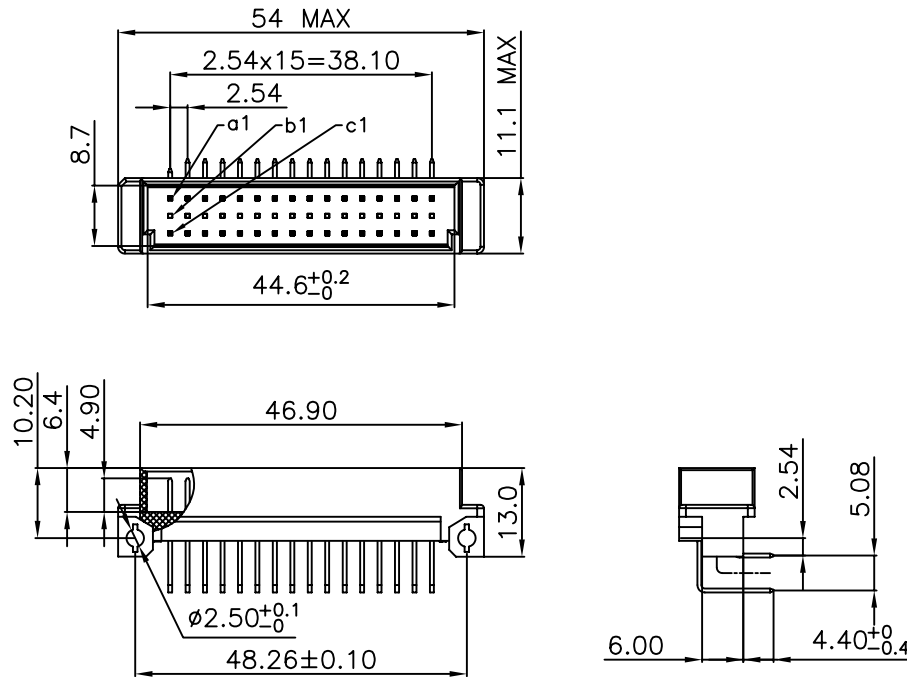

Recommended P.C.B. layout

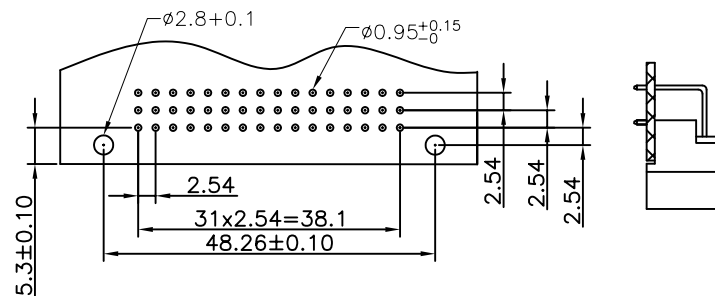

照片框

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X. ±

CHECKED BY GENIUS

.X ±

UNIT / mm

SCALE 1 : 1

.XX ±

DATE

.XXX ±

ANG ±

SIZE A4

PPOJECTION

ORDER INFORMATION

UC-PR44-2X16-LF
SERIES LEADFREE
32 WAY
DIP 4.4mm
DIP 90°
MALE

DESCRIPTION:

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com