

- NOTE:
1. TEMPERATURE RANGE: -55°C TO +125°C
 2. CURRENT RATING: 20°C 2A, 70°C 1A, 100°C 0.5A
 3. CONTACT RESISTANCE: 30 MILLIOHMS MAX. AT DC100mA
 4. DIELECTRIC VOLTAGE: AC 1100V FOR 1 MINUTE
 5. INSULATION RESISTANCE: 1000 MEGOHMS MIN. AT DC500V
 6. OPERATING VOLTAGE: 251VAC

③	OPTIONAL	BOARD-LOCK : BRASS, 100u" MIN. TIN PLATING
②	NO. OF POS.	CONTACT : BRASS, NICKEL PLATING OVER ALL AT 50 u" MIN. SOLDER AREA PLATING: 11u" MIN. TIN, CONTACT AREA PLATING GOLD
①	1	HOUSING : PBT UL94V-II, COLOR GRAY
ITEM	Q'TY	DESCRIPTION

RoHS Compliant


TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

DRAWING BY CY		X. ± .X ± .XX ± .XXX ± ANG ±
CHECKED BY GENIUS		
UNIT / mm	SCALE 1 : 1	
DATE		
SIZE A4	PPOJECTION	



ORDER INFORMATION

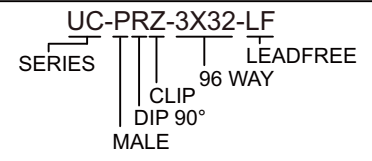

DESCRIPTION: