
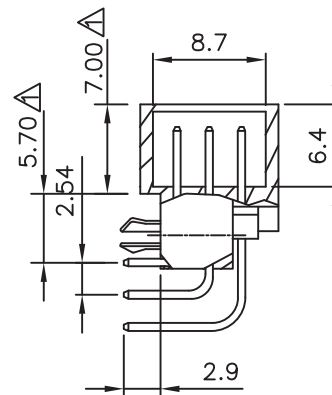
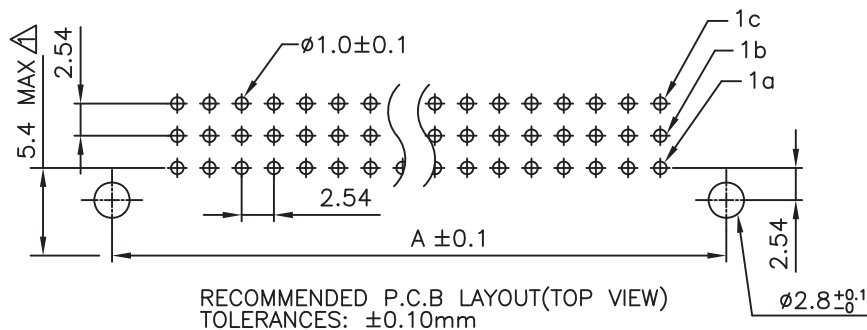
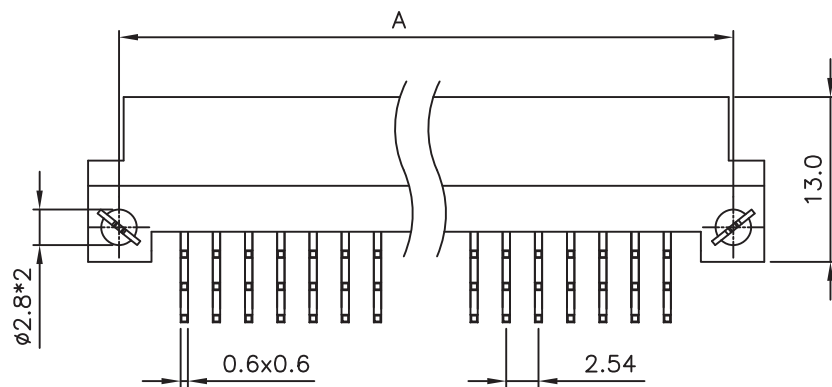


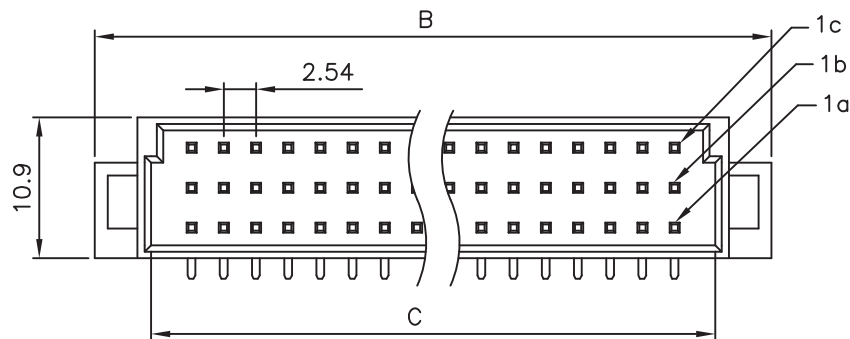

SPECIFICATION

MATERIAL

Insulator: PBT, rated UL94V-0 (standard)

Contacts: Brass (Male) ; Phosphor Bronze (Female)

Rivet,Boardlock: Copper alloy

CONTACT PLATING

Underplate: 50m Nickel

Contact area: 1m~30m Selective gold

Solder tails area: 100m Tin/Lead

ELECTRICAL

Operation voltage: 250 VAC max.

Current rating: 3 Amps max.

Contact resistance: 20 mohms max.

Insulation resistance: 3000 Mohms min @ 500 VDC

Dielectric withstanding voltage: 1000 VAC / minute

Operating temperature: -55°C TO $+105^{\circ}\text{C}$

PART NO.	A	B	C
UC-PRZ-3X32	88.90	94	85.5
UC-PRZ-3X16	48.26	53.5	44.6

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X. ± 0.50

CHECKED BY GENIUS

.X ± 0.30

UNIT / mm

SCALE 1 : 1

.XX ± 0.20

DATE

.XXX $\pm$

ANG $\pm$

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

UC-PRZ-3Xxx-LF
 SERIES | LEADFREE
 3X16:48 WAY
 3X32:96 WAY
 CLIP
 DIP 90°
 MALE

DESCRIPTION: DIP 41612 (THREE ROW) MALE 96PIN

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com