




Material:

Housing: 30% Glass filled PBT UL94V-0.
 Contacts: Brass.
 Lock: Phosphor Bronze.

Electrical Characteristics:

Current Rating: 2 AMP.
 Dielectric Withstanding Voltage: AC 1000V For 1 minute.
 Insulator Resistance: 1000MΩ min. at DC 500V.
 Contact Resistance: 30mΩ max. at DC 100mA.
 Operating Temperature: -55°C~+105°C .

***RoHS Compliant**

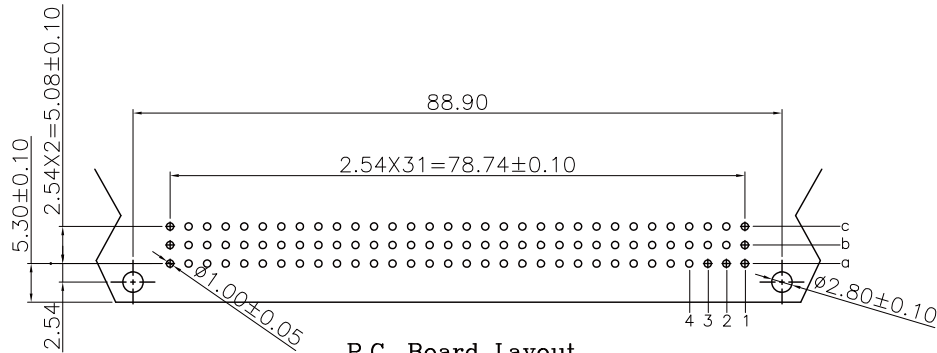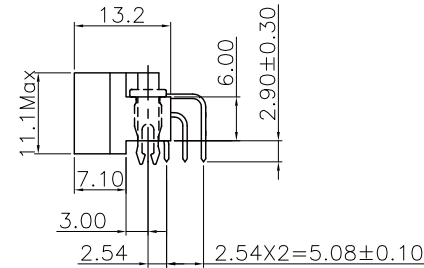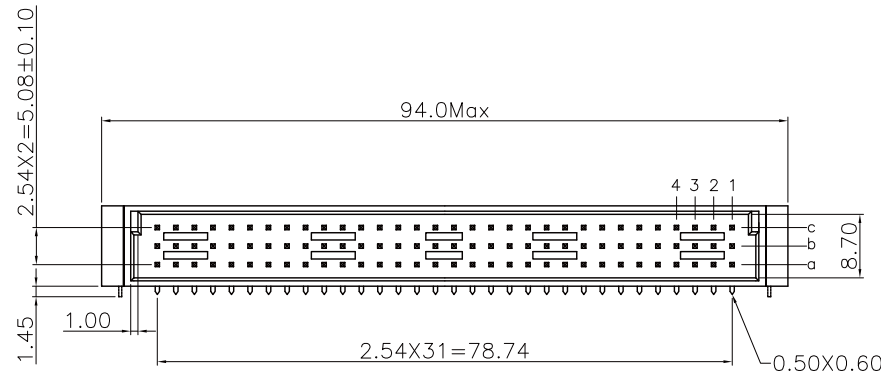

P.C. Board Layout

| Pitch | Position | Rows with Contacts | Contact Arrange | P/N |
|--------|----------|--------------------|-----------------|-------------|
| 2.54mm | 96 | a b c | | UC-PRZ-3X32 |
| | 64 | a - c | | UC-PRZ-2X32 |
| | 32 | a - - | | UC-PRZ-1X32 |

RoHS Compliant

TOLERANCES ARE



煜倫股份有限公司


www.morethanall.com

DRAWING BY CY
 CHECKED BY GENIUS
 UNIT / mm SCALE 1 : 1
 DATE
 SIZE A4 PPROJECTION

X.±
 .X±
 .XX±
 .XXX±
 ANG±

照片框

ORDER INFORMATION

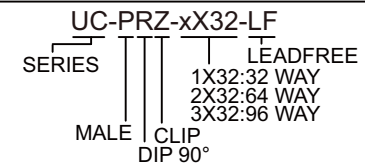

DESCRIPTION: