
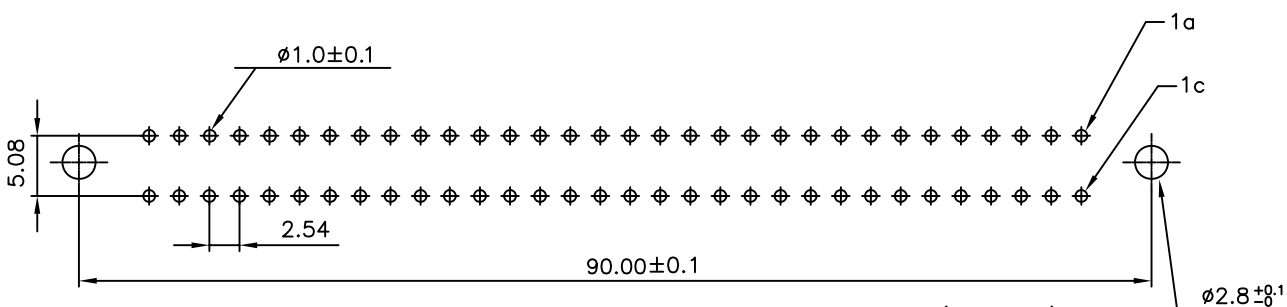
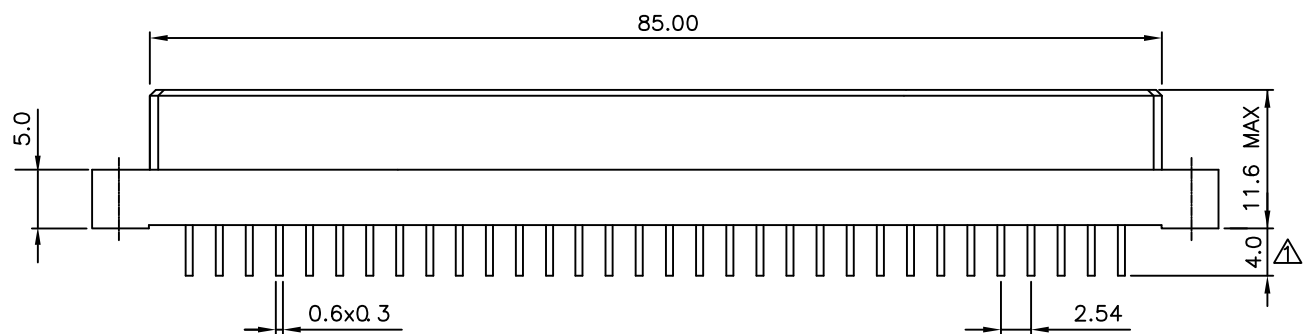


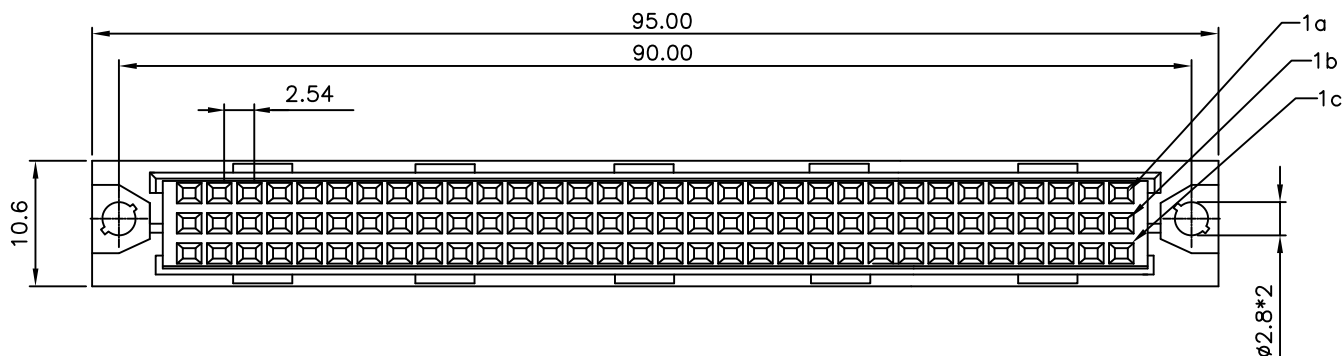

RECOMMENDED P.C.B LAYOUT(TOP VIEW)
TOLERANCES: $\pm 0.10\text{mm}$

SPECIFICATION

MATERIAL

Insulator: Thermal Plastic UL94V-0

Contacts: Copper alloy

Rivet, Boardlock: Copper alloy

CONTACT PLATING

Underplate: 50u"~100u" Nickel

Contact area: 1m"~30m" Selective gold

Solder tails area: 100u"~200u" Tin (Lead Free)

ELECTRICAL

Operation voltage: 250 VAC max.


Current rating:	TEMP(°C)	20	70	100
	CURRENT	2.0A	1.6A	1.0A

Contact resistance: 20 mohms max.

Insulation resistance: 1000 Mohms min @ 500 VDC

Dielectric withstanding voltage: 1000 VAC / minute

Operation Temperature: -55°C to +125°C



RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$ 0.30
.XX $\pm$ 0.20
.XXX $\pm$
ANG $\pm$

照片框

ORDER INFORMATION

UC-SDS15-2X32-LF

SERIES
LEADFREE
64 WAY
SEMI GOLD 15u"
DIP 180°
FEMALE

DESCRIPTION: DIN 41612 (THREE ROW) FEMALE 64PIN