


NUMBER OF CONTACTS	ROWS/POSITIONS WITH CONTACT			PITCH
48	G	a+b+c		2.54 mm
32	H	a+c		
16	J	a		

④	OPTIONAL	BOARD-LOCK : BRASS, 100u" MIN. TIN PLATING
③	NO. OF POS.	CONTACT : PHOSPHOR BRONZE, NICKEL PLATING OVER ALL AT 50u" MIN. SOLDER AREA PLATING: 100u" MIN. TIN, CONTACT AREA PLATING GOLD
②	1	SPACER : PBT UL94V-1, COLOR GRAY
①	1	HOUSING : PBT UL94V-1, COLOR GRAY
ITEM	Q'TY	DESCRIPTION

 煜倫股份有限公司 www.morethanall.com		RoHS Compliant		TOLERANCES ARE	
DRAWING BY CY		X, ±		.X ± 0.30	
CHECKED BY GENIUS				.XX ± 0.25	
UNIT / mm		SCALE 1 : 1		.XXX ±	
DATE				ANG ±	
SIZE A4		PROJECTION			

照片框

ORDER INFORMATION

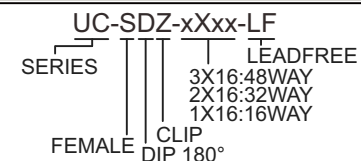

DESCRIPTION: