

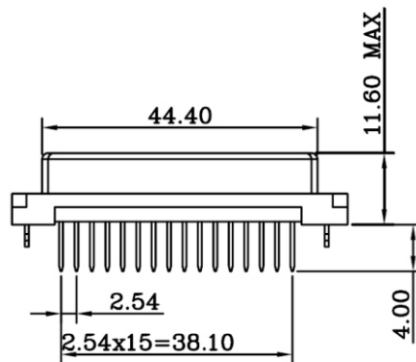


Dimensions

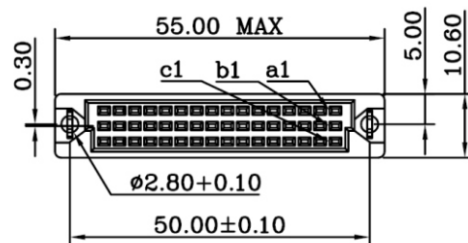

Technical data

EURO DIN 41612:

Housing:

Contact:

Plating:

Operating temperature:

Contact resistance:

Insulator resistance:

Current rating:

Withstanding voltage:

Insertion force:

Withdrawal force:

Contact Rating:

RoHS Compliant

Signal

PBT & 30%Class Fiber(UL94-0)

Male : Brass

Female : Phosphor Bronze

Tin-plated on tail

-55°C~+105°C

30m(ohm)max.at DC 500V

1000M(ohm)min.at DC 500V

2 AMP

AC 1000V for 1 minute

96pin max.90N 30pin max.28N



64pin max.60N 20pin max.18N

48pin max.45N 32pin max.30N

0.15 N min.per individual contact

Class 2

Recommended P.C.B. layout

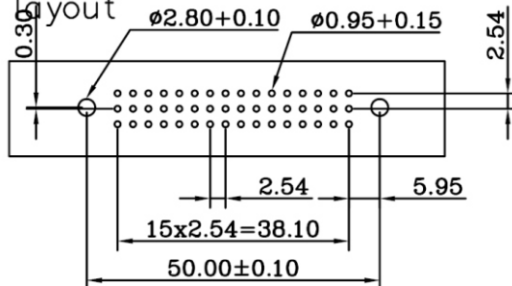

照片框

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X, ±

CHECKED BY GENIUS

.X, ±

UNIT / mm

SCALE 1 : 1

.XX, ±

DATE

.XXX, ±

SIZE A4

PPOJECTION

ANG, ±

ORDER INFORMATION

UC-SDZS15-3X32-LF
SERIES | | | | LEADFREE
96 WAY
SEMI GOLD 15u"
CLIP
DIP 180°
FEMALE

DESCRIPTION:

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com