
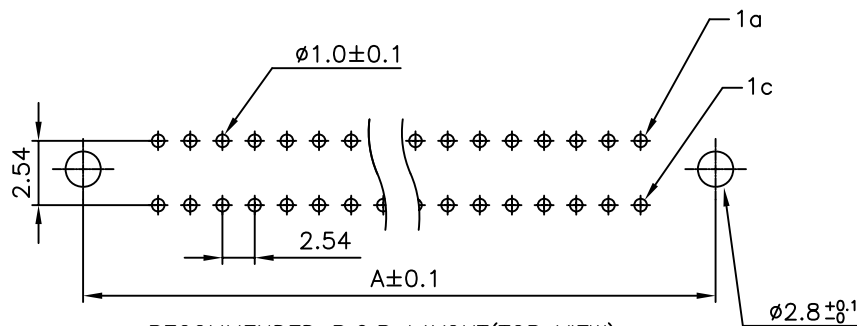

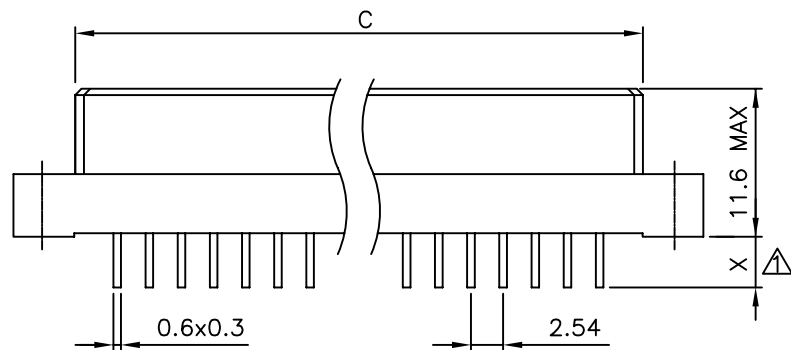


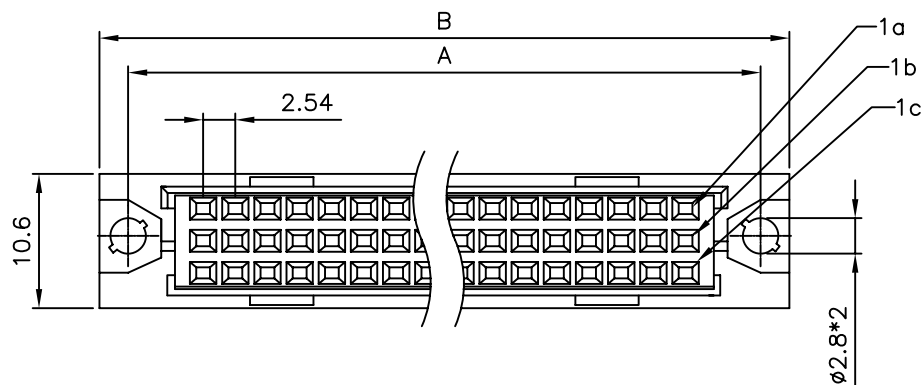

RECOMMENDED P.C.B LAYOUT(TOP VIEW)
TOLERANCES: $\pm 0.10\text{mm}$

△ SPECIFICATION MATERIAL

Insulator: PBT, rated UL94V-0 (standard)
Contacts: Brass (Male) ; Phosphor Bronze (Female)
Rivet, Boardlock: Copper alloy
CONTACT PLATING
Underplate: 40m Nickel
Contact area: 1m~30m Selective gold
Solder tails area: 100m Tin/Lead
ELECTRICAL
Operation voltage: 250 VAC max.
Current rating: 3 Amps max.
Contact resistance: 20 mohms max.
Insulation resistance: 3000 Mohms min @ 500 VDC
Dielectric withstanding voltage: 1000 VAC / minute

△ CONTACT LENGTH DIM. FOR "X":

02	2.5mm
BLANK	4.0mm
13	13.0mm
17	17.0mm

BLANK: 4.0mm/TAIL

NOTE:

PART NO.	A	B	C
UC-SDxx-2X32	90.00	95.0	85.0
UC-SDxx-2X16	50.00	55.0	44.4

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

UC-SDxx-2Xxx-LF
SERIES
FEMALE
DIP 180°
LEADFREE
2X32:64WAY
2X16:32WAY
BLANK:DIP 4.0mm
02:DIP 2.5mm
13:DIP 13.0mm
17:DIP 17.0mm

DESCRIPTION: DIN 41612 (THREE ROW) FEMALE 64PIN & 32PIN