
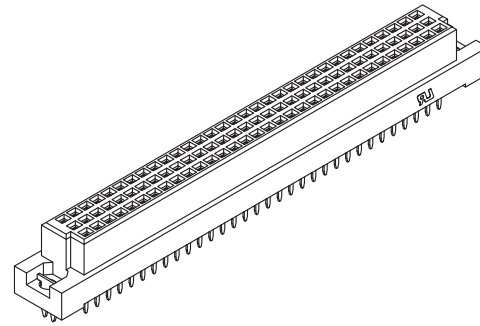


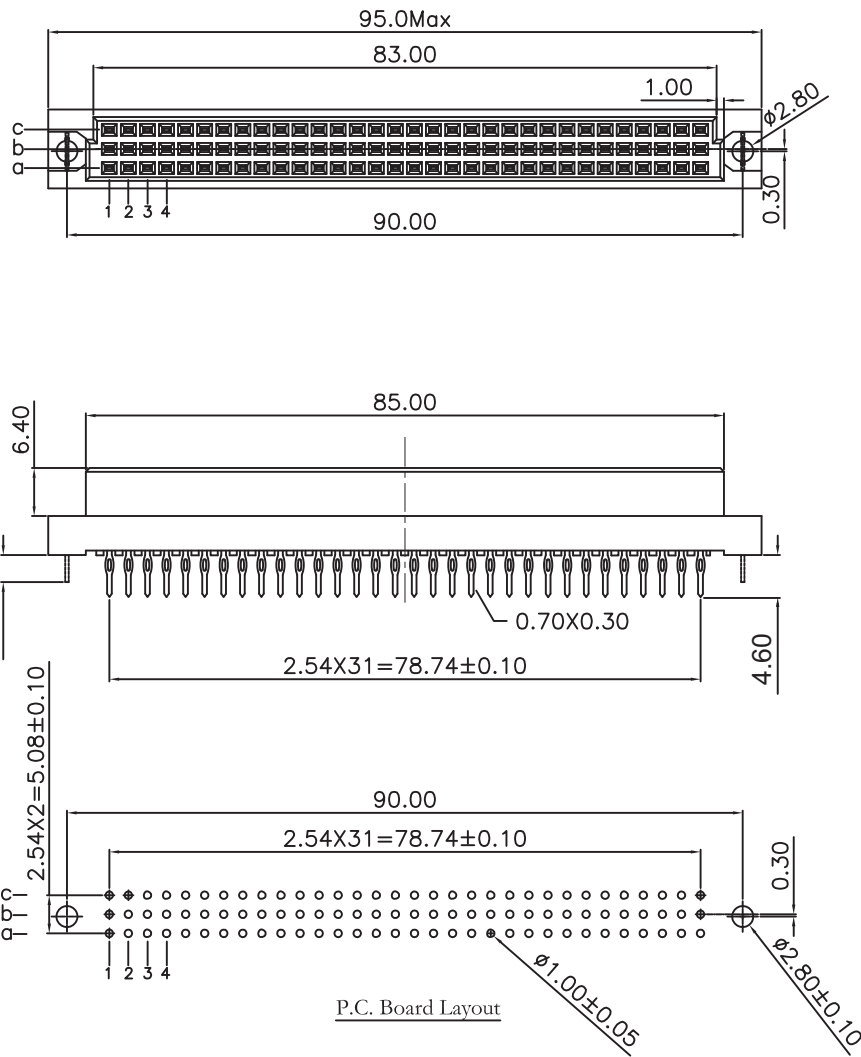

Material:

Housing: Thermoplastic Polyester Glass Filled UL94V-0.

Contacts: Copper Alloy.

Lock: Copper Alloy.

Electrical Characteristics:

Current Rating: 2 AMP.

Dielectric Withstanding Voltage: AC 1000V For 1 minute.

Insulator Resistance: 1000M Ω min. at DC 500V.

Contact Resistance: 20m Ω max. at DC 100mA.

Operating Temperature: -55 $^{\circ}$ C~+125 $^{\circ}$ C .

***RoHS Compliant**

2.54mm	96	a b c		UC-SPZ-3X32
	64	a - c		UC-SPZ-2X32
	32	a - -		UC-SPZ-1X32
5.08mm	48	a b c		UC-SPZ-3X32EE
	32	a - c		UC-SPZ-2X32EE
	16	a - -		UC-SPZ-1X32EE
Pitch	Position	Rows With Contacts	Contact Arrange	P/N

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. $\pm$ 0.50

.X $\pm$ 0.25

.XX $\pm$ 0.15

.XXX $\pm$

ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

UC-SPZ-xXxx-LF
SERIES P/N LEADFREE
CLIP PRESS FIT FEMALE

DESCRIPTION: