
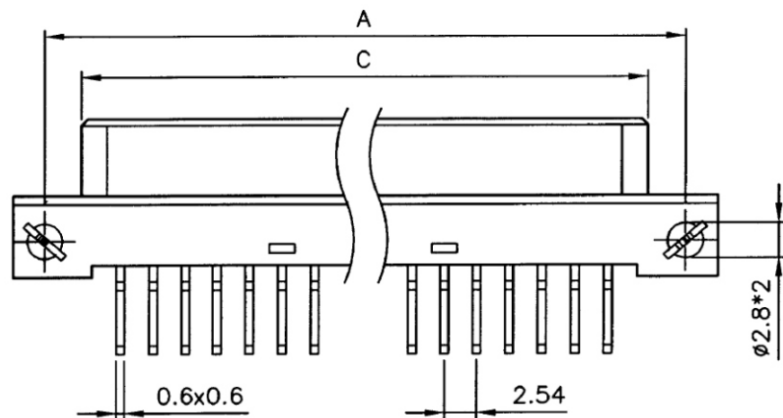
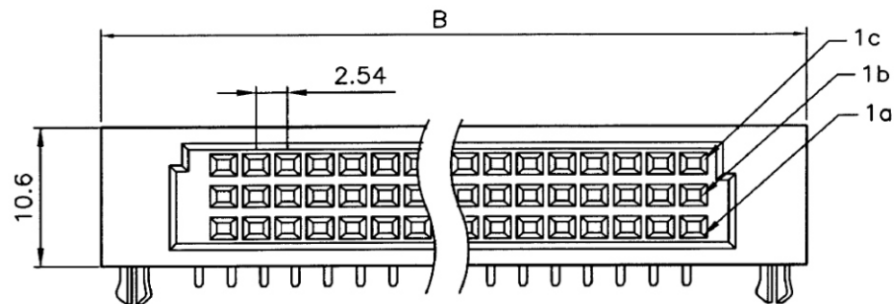


RECOMMENDED P.C.B LAYOUT(TOP VIEW)
TOLERANCES: $\pm 0.05\text{mm}$

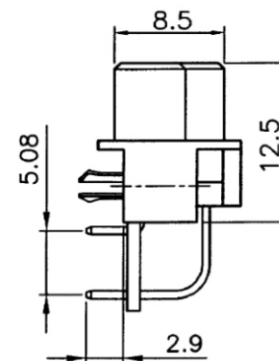

SPECIFICATION

MATERIAL

Insulator: Thermal Plastic UL94V-0

Contacts: Copper Alloy

Rivet, Boardlock: Copper Alloy

CONTACT PLATING

Underplate: $50\mu\text{m} \sim 100\mu\text{m}$ Nickel

Contact Area: $1\mu\text{m} \sim 30\mu\text{m}$ Selective Gold

Solder Tails Area: $100\mu\text{m} \sim 200\mu\text{m}$ Tin (Lead Free)

ELECTRICAL

Operation Voltage: 250 VAC Max.

Current Rating:

TEMP(°C)	20	70	100
CURRENT	2.0A	1.8A	1.0A

Contact Resistance: 20 mohms Max.

Insulation Resistance: 3000 Mohms Min. @ 500 VDC

Dielectric Withstanding Voltage: 1000 VAC / Minute

Temperature Range: -55°C TO $+125^{\circ}\text{C}$

NOTE:

PART NO.	A	B	C
UC-SRZ-2X32	88.90	94.00	85.00
UC-SRZ-2X16	48.26	54.30	44.40

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$

.X $\pm$

.XX $\pm$

.XXX $\pm$

ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

UC-SRZ-2Xxx-LF
SERIES | LEADFREE
2X16:32 WAY
2X32:64 WAY
CLIP
DIP 90°
FEMALE

DESCRIPTION: