
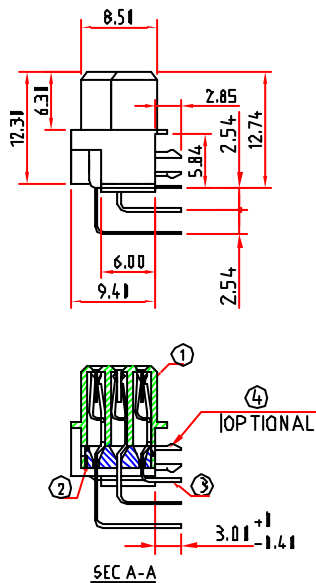


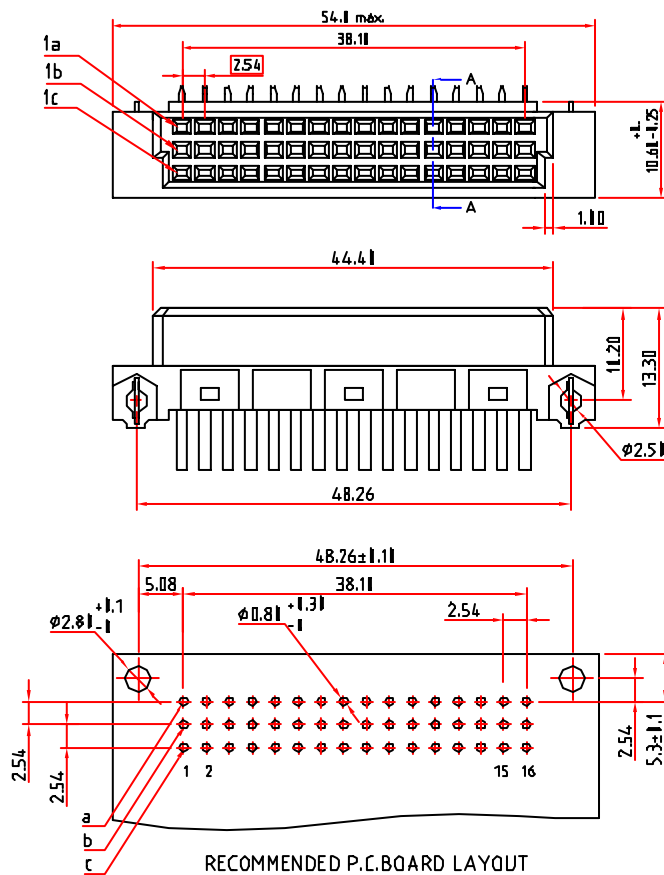

NOTE:

1. WITHDRAWL FORCE PER CONTACT: 0.015kg MIN.
2. TEMPERATURE RANGE: -55°C TO +125°C.
3. CURRENT RATING: 20°C 2A, 70°C 1A, 100°C 0.5A
4. CONTACT RESISTANCE: 30 MILLIOHMS MAX. AT DC100mA
5. DIELECTRIC VOLTAGE: AC 1000V FOR 1 MINUTE
6. INSULATION RESISTANCE: 1000 MEGOHMS MIN. AT DC500V
7. OPERAITING VOLTAGE: 250VAC

④	OPTIONAL	BOARD-LOCK : BRASS, 100u" MIN. TIN PLATING
③	NO. OF POS.	CONTACT : PHOSPHOR BRONZE, NICKEL PLATING OVER ALL AT 5u" MIN. SOLDER AREA PLATING: 10u" MIN. TIN, CONTACT AREA PLATING GOLD
②	1	SPACER : PBT UL94V-1, COLOR GRAY
①	1	HOUSING : PBT UL94V-1, COLOR GRAY
ITEM	Q'TY	DESCRIPTION

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.25
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

UC-SRZ-3X16-LF
SERIES CLIP LEADFREE
48 WAY
DIP 90°
FEMALE

DESCRIPTION: