


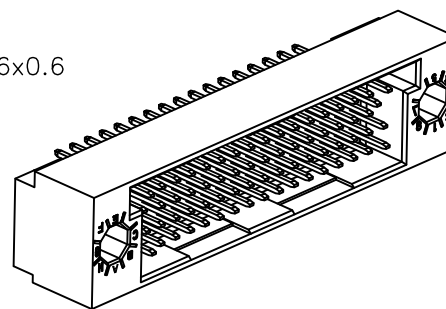

Material:

Housing: High Temperature Plastic UL94V-0

Contacts: Copper Alloy

Electrical Characteristics:

Current Rating: 2 AMP.



Dielectric Withstanding Voltage: AC 1000V For 1 minute.

Insulator Resistance: 1000M Ω min. at DC 500V.

Contact Resistance: 20mΩ max. at DC 100mA.


Operating Temperature: -55°C ~ +125°C .

***RoHS Compliant**

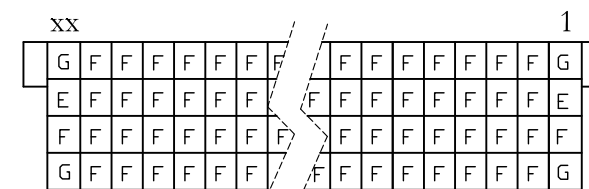

Columns

Dip Length	E		F	G
	4.65		5.65	6.65
X Length	1		2	
	2.50		4.00	
Position	Dimension			
	A	B	C	D
100	82.55	60.96	74.93	65.02
128	100.33	78.74	92.71	82.80
160	120.65	99.06	113.03	103.12
200	146.05	124.46	138.43	128.52
240	171.45	149.86	163.83	153.92

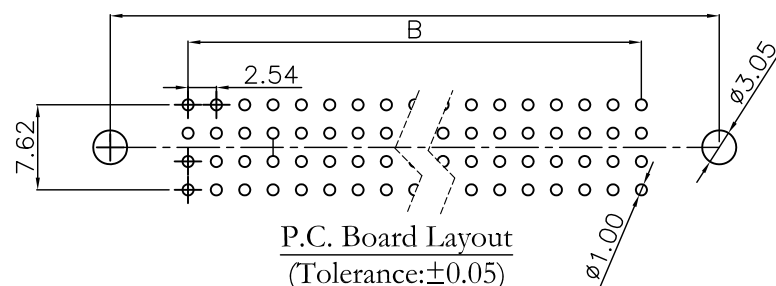

P.C. Board Layout
(Tolerance: ± 0.05)

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

 $X_{\pm}$

CHECKED BY GENIUS

$$X \pm 0.50$$

UNIT / mm	SCALE 1 : 1
-----------	-------------

 $.XXX \pm 0.15$

DATE _____

P PROJECTION 

照片框

ORDER INFORMATION

UD-PDxx-4Xxx-LF		LEADFREE
SERIES	MALE	4X25:100WAY
	DIP 180°	4X32:128WAY
		4X40:160WAY
02:DIP 2.5mm		4X50:200WAY
04:DIP 4.0mm		4X60:240WAY

DESCRIPTION:

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司

www.morethanall.com

SIZE A4