

DIN 41612 EUROCARD CONNECTORS

Vertical Female Type C Connectors

Technical data

EURO DIN 41612
Housing
Contact






Operating temperature
Contact resistance
Insulator resistance
Current rating
Withstanding voltage
Insertion force

Withdrawal force
Contact Rating:

Signal
PBT & 30%Class Fiber(UL94-0)
Male : Brass
Female : Phosphor Bronze

-55°C~+105°C
30m(ohm)max.at DC 500V
1000M(ohm)min.at DC 500V
2 AMP
AC 1000V for 1 minute

88pin max.80N 30pin max.28N
84pin max.60N 20pin max.18N
48pin max.45N 32pin max.30N
0.15 N min.per individual contact
Class 2

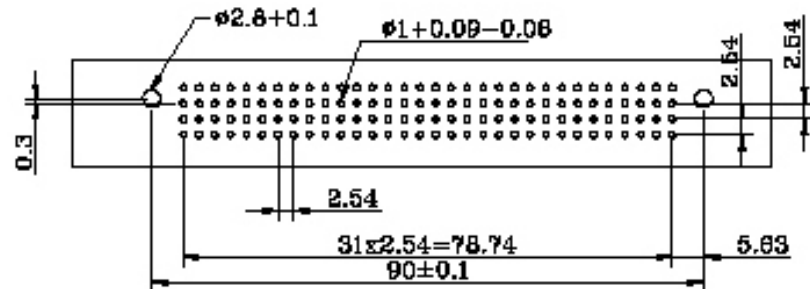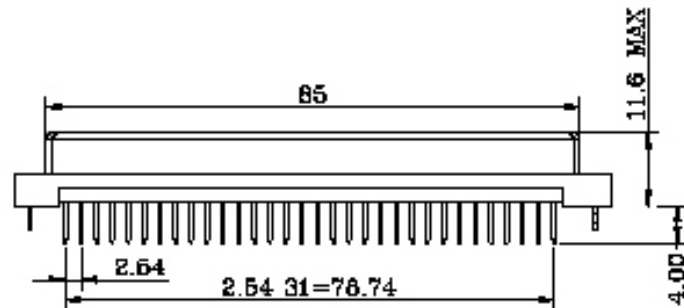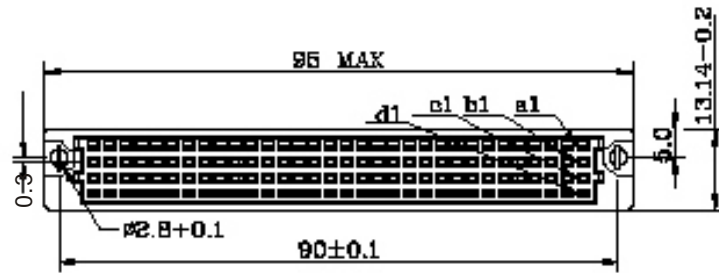

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±
X, ±
.XX ±
.XXX ±
ANG ±

PJECTION

照片框

ORDER INFORMATION

UD-SDZ-4X32-LF
SERIES CLIP LEADFREE
128 WAY
DIP 180°
FEMALE

DESCRIPTION: