
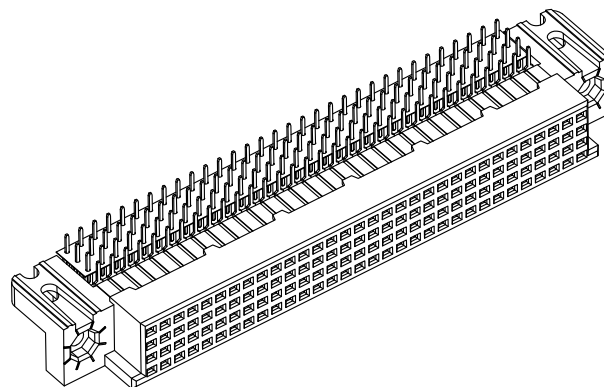


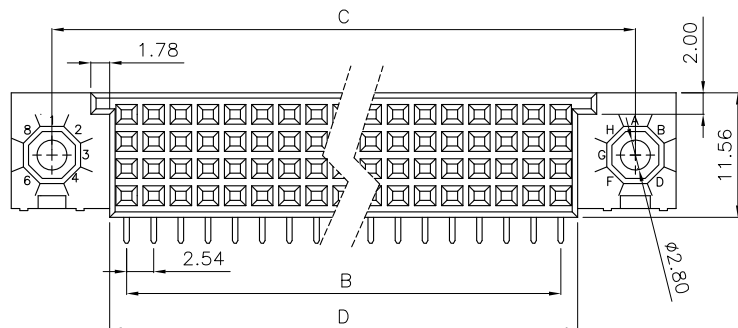

Material:

Housing: High Temperature Plastic UL94V-0

Contacts: Phosphor Bronze

Electrical Characteristics:

Current Rating: 2 AMP.




Dielectric Withstanding Voltage: AC 1000V For 1 minute.

Insulator Resistance: 1000M Ω min. at DC 500V.

Contact Resistance: 30m Ω max. at DC 100mA.

Operating Temperature: -65°C ~+125°C .

***RoHS Compliant**

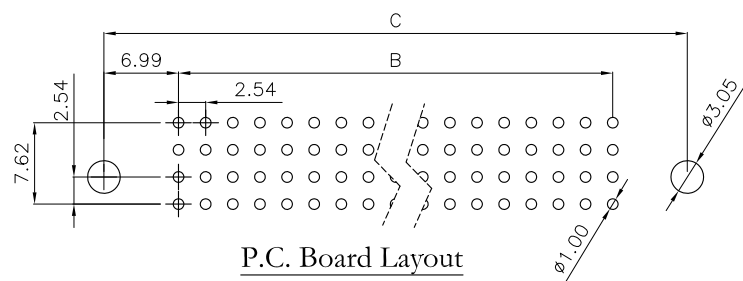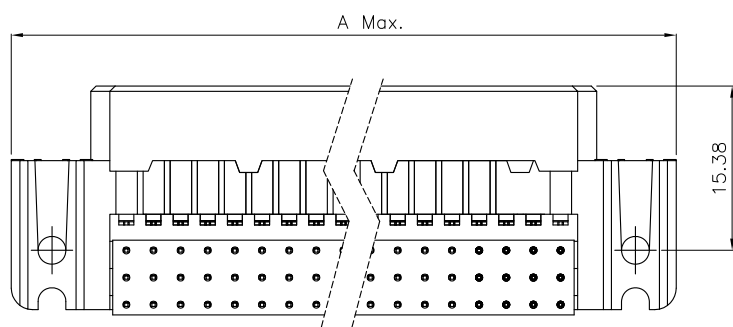

P.C. Board Layout
(Tolerance: ± 0.05)

PART NO.	Position	Dimension			
		A	B	C	D
UD-SR-4X25	100	82.55	60.96	74.93	64.12
UD-SR-4X32	128	100.33	78.74	92.71	81.90
UD-SR-4X40	160	120.65	99.06	113.03	102.22
UD-SR-4X50	200	146.05	124.46	138.43	127.62
UD-SR-4X60	240	171.45	149.86	163.83	153.02

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$

.X $\pm$

.XX $\pm$

.XXX $\pm$

ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

UD-SR-4Xxx-LF
SERIES | LEADFREE
FEMALE | 4X25:100WAY
DIP 90° | 4X32:128WAY
| 4X40:160WAY
| 4X50:200WAY
| 4X60:240WAY

DESCRIPTION: