
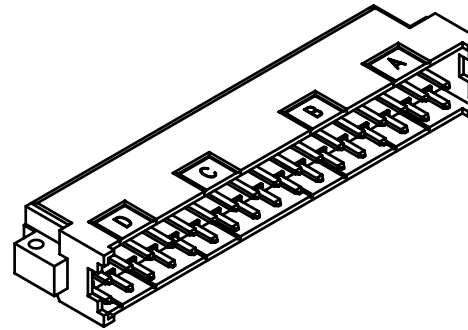


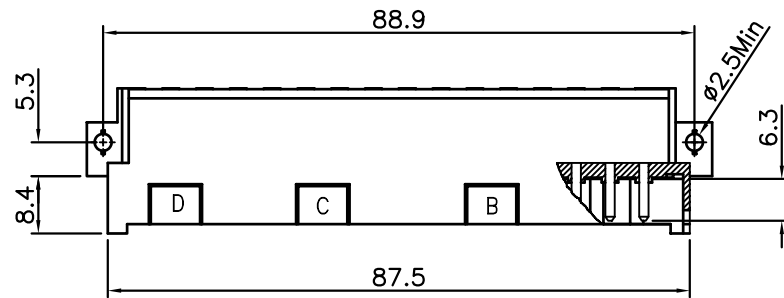

Material:

Housing: 30% Glass filled PBT UL94V-0.

Contacts: Brass.

Electrical Characteristics:

Current Rating: 5.6AMP.




Dielectric Withstanding Voltage: AC1000V For 1 minute.

Insulator Resistance: 1000MΩ min. at DC 500V.

Contact Resistance: 30mΩ max. at DC 100mA.

Operating Temperature: -55°C ~ +105°C .

***RoHS Compliant**

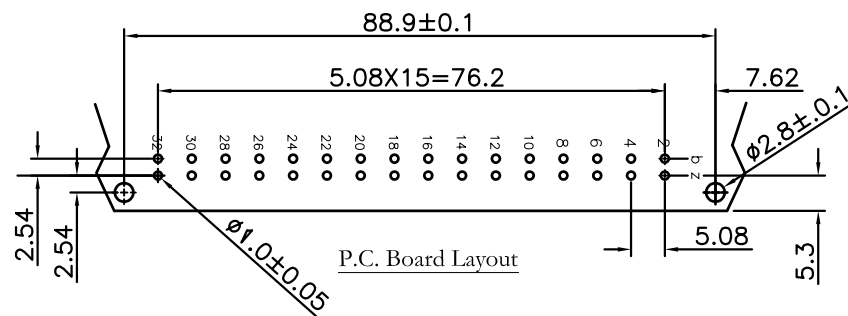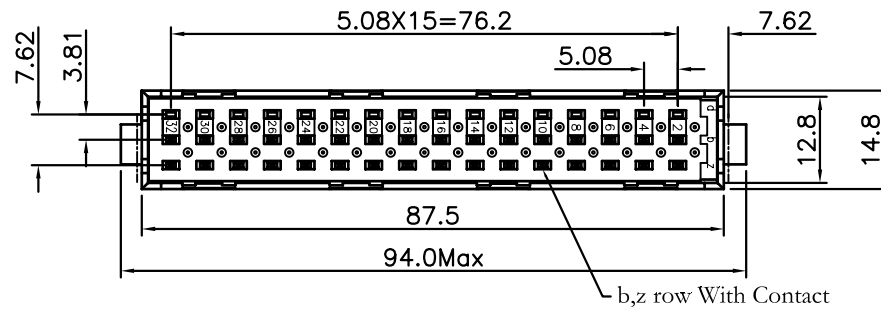

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION


X. ±

.X ±

.XX ±

.XXX ±

ANG ±



ORDER INFORMATION

UF-PR-2X16BZ-LF
SERIES LEADFREE
B+Z ROW
32 WAY
DIP 90°
MALE

DESCRIPTION: