
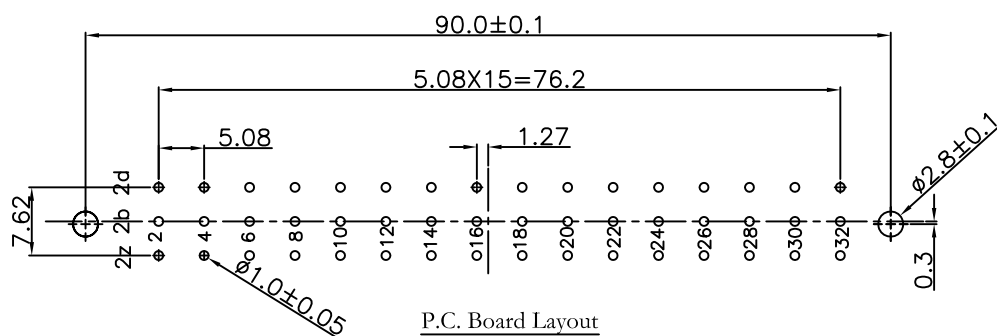



Material:

Housing: Thermoplastic Polyester Glass Filled UL94V-0.
Contacts: Copper Alloy.

Electrical Characteristics:

Current Rating: 5.6 AMP.
Dielectric Withstanding Voltage: AC 1550V For 1 minute.
Insulator Resistance: 1000MΩ min. at DC 500V.
Contact Resistance: 15mΩ max. at DC 100mA.
Operating Temperature: -55°C~+125°C .

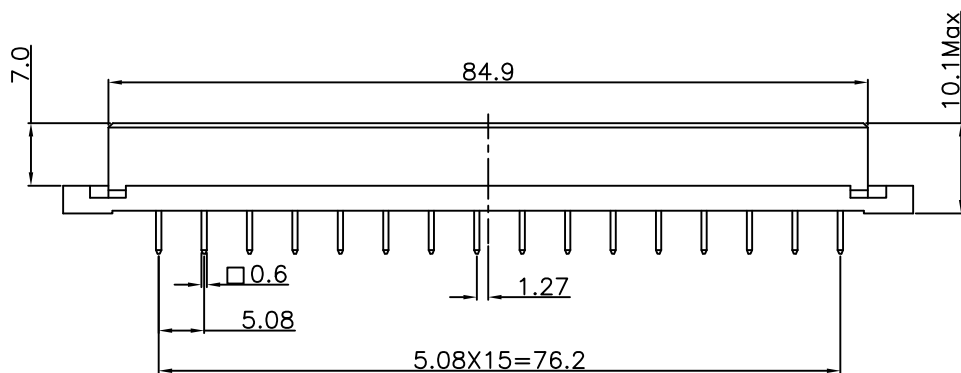

P.C. Board Layout

Pitch	Position	Rows with Contacts	Contact Arrange
5.08mm	48	z b d	
	32	z - d	
	16	z - -	

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50

.X ± 0.25

.XX ± 0.15

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

UF-SD-xX16-LF
SERIES LEADFREE
FEMALE 3X16:48WAY
2X16:32WAY
1X16:16WAY
DIP 180°

DESCRIPTION: