
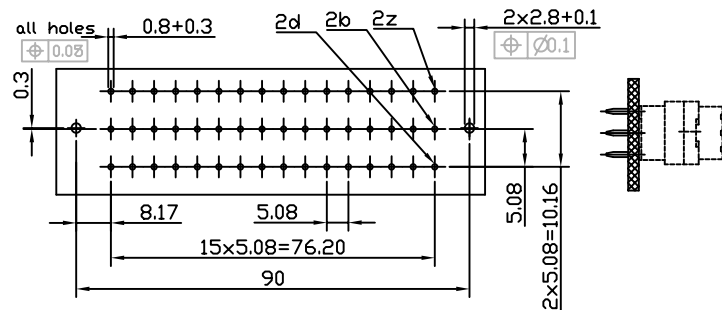
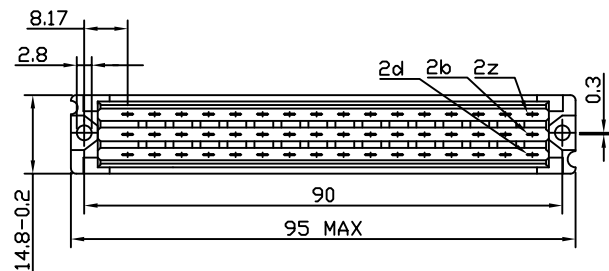


Technial data

Housing
Contact
Operating temperature
Contact resistance
Insulator resistance
Current rating
Withstanding voltage
Insertion force
Withdrawal force
Contact Rating

PBT & 30%Class Fiber(UL94-0)
Female : Phosphor Bronze
-55°C~+105°C
30m(ohm)max.at DC 100mA
1000M(ohm)min.at DC 500V
5.6 AMP
AC 1000V for 1 minute
75N max
0.15N/pin min
Selective Gold ,Plating

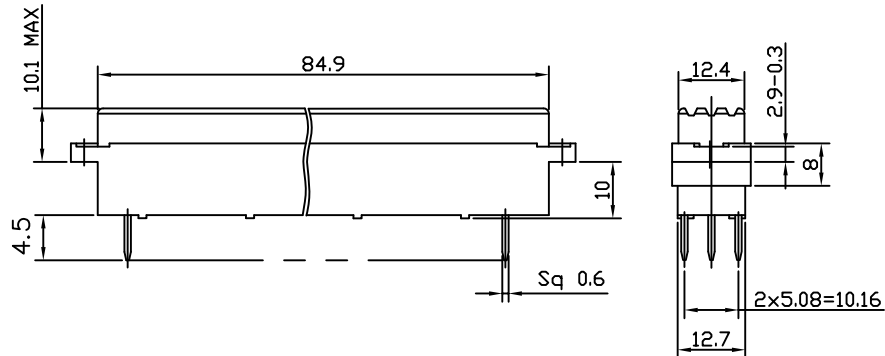

d+b+z	b+z	d+z
d	d	d
b	b	b
z	z	z
2	2	2
4	4	4
6	6	6
8	8	8
10	10	10
12	12	12
14	14	14
16	16	16
18	18	18
20	20	20
22	22	22
24	24	24
26	26	26
28	28	28
30	30	30
32	32	32
48	32	32

Contact arrangement
view from termination side

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1


DATE

SIZE A4

PPOJECTION

TOLERANCES ARE

X. ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

UF-SDH-3X16-LF
SERIES
LEADFREE
32 WAY
HIGH BODY
DIP 180°
FEMALE

DESCRIPTION: DIN 41612 EUROCARD CONNECTORS