
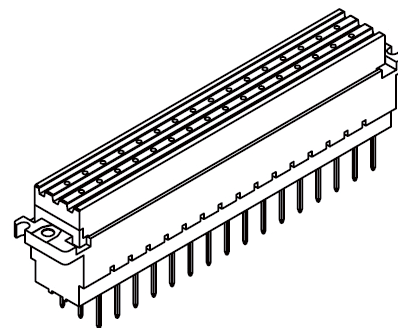


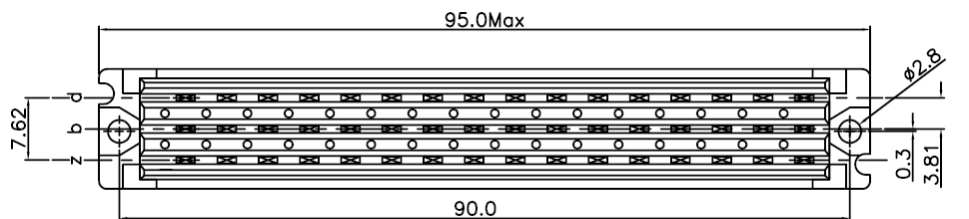

Material:

Housing: 30% Glass filled PBT UL94V-0.

Contacts: Phosphor Bronze.

Electrical Characteristics:

Current Rating: 5.6 AMP.




Dielectric Withstanding Voltage: AC 1000V For 1 minute.

Insulator Resistance: 1000MΩ min. at DC 500V.

Contact Resistance: 30mΩ max. at DC 100mA.

Operating Temperature: -55°C ~ +105°C.

***RoHS Compliant**

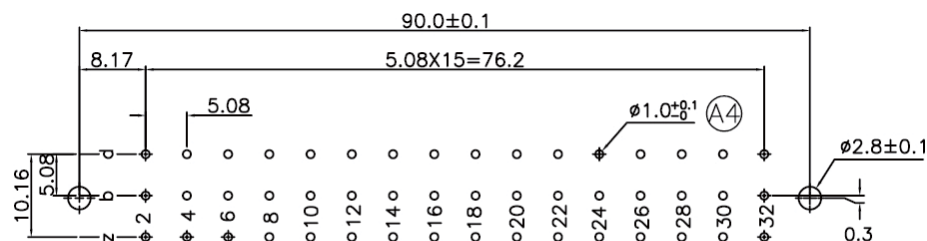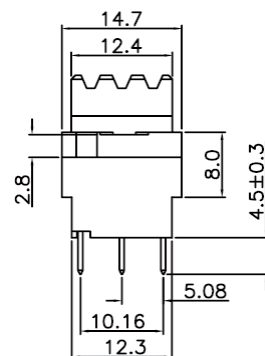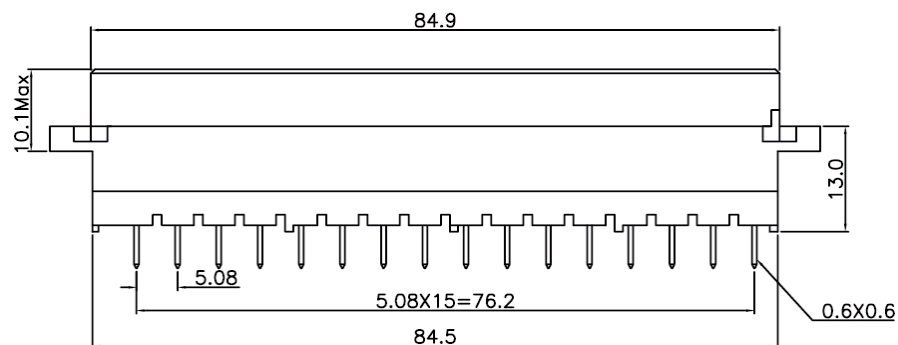

P.C. Board Layout

Pitch	Position	Rows with Contacts	Contact Arrange
5.08mm	48	z b d	
	32	z - d	
	16	z - -	

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

UF-SDH-xXxx-LF
SERIES LEADFREE
FEMALE 3X16:48 WAY
2X16:32 WAY
1X16:16 WAY
HIGH BODY
DIP 180°

DESCRIPTION: