

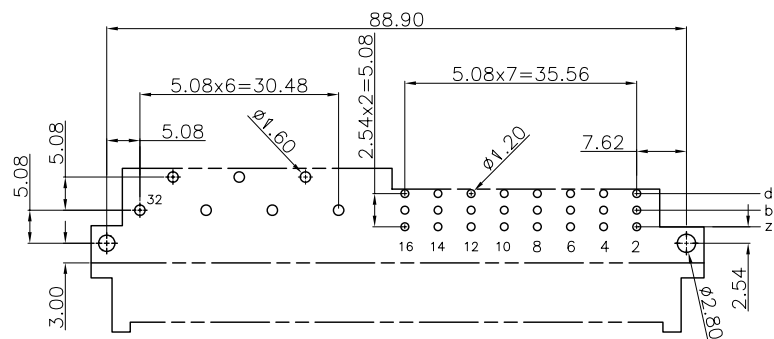
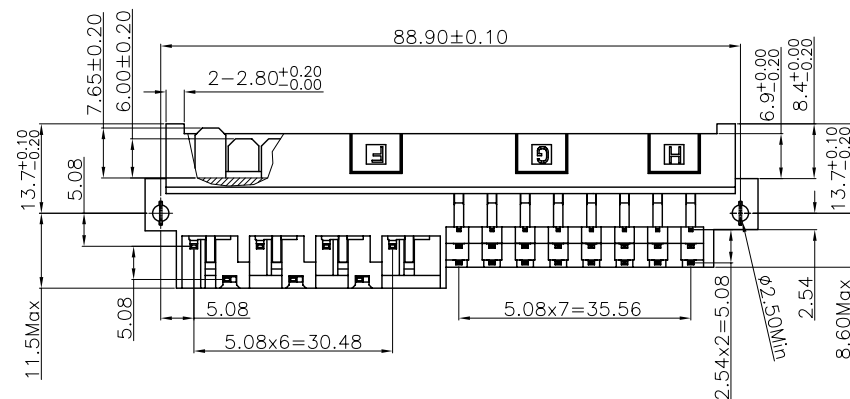


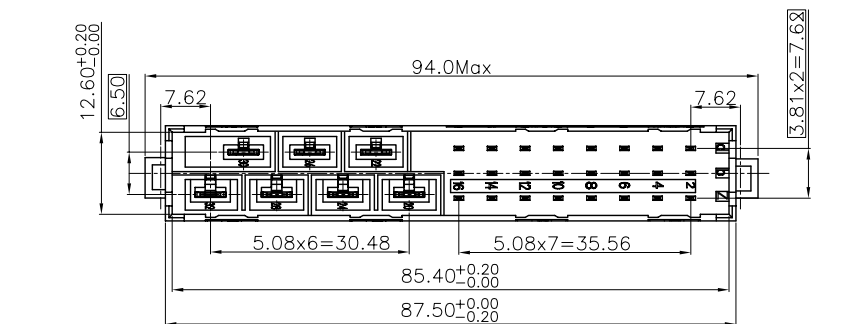

P.C. Board Layout
(Tolerance:±0.05)




Material:

Housing: Thermoplastic Polyester Glass Filled UL94V-0.
Contacts: Copper Alloy.
Lock: Copper Alloy.

Electrical Characteristics:

Current Rating: 5.6 AMP/15 AMP.
Dielectric Withstanding Voltage: F Type AC 1550V/ H Type AC 3100V.
Insulator Resistance: 1000MΩ min. at DC 500V.
Contact Resistance: F Type 30mΩ max/ H Type 8mΩ max. at DC 100mA.
Operating Temperature: -55°C~+105°C.

***RoHS Compliant**

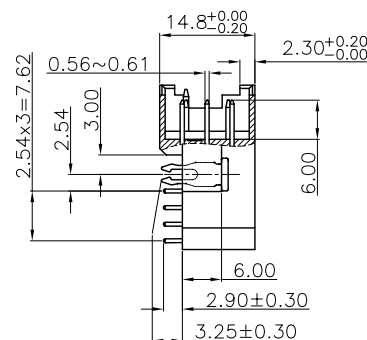

CONTACT NO.	Mating Length
z32	7.65
other pin	6.0

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X, ±

CHECKED BY GENIUS

.X ± 0.50

UNIT / mm

SCALE 1 : 1

.XX ± 0.25

DATE

.XXX ± 0.15

SIZE A4

PPOJECTION

ANG ±

照片框

ORDER INFORMATION

UFH-PRx-24+7-LF
SERIES | LEADFREE
24+7 WAY
BLANK:NON CLIP
MALE Z:CLIP
DIP 90°

DESCRIPTION: DIN41612 Mixed Style H7/F24 Male

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com