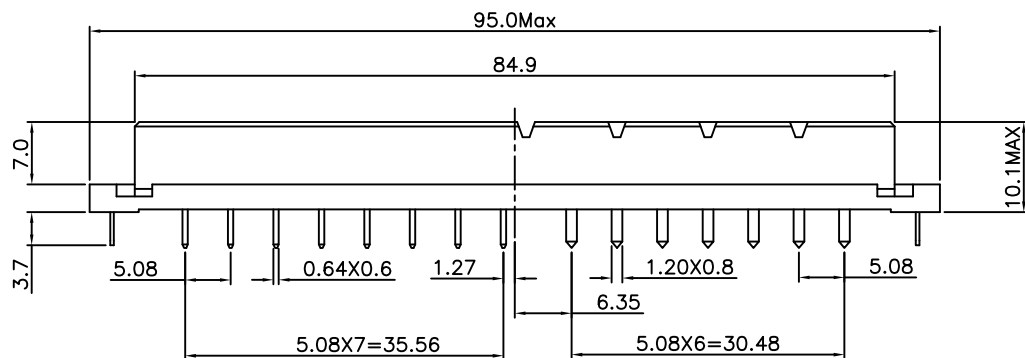
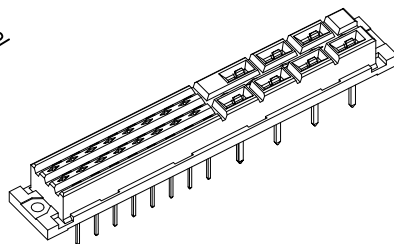
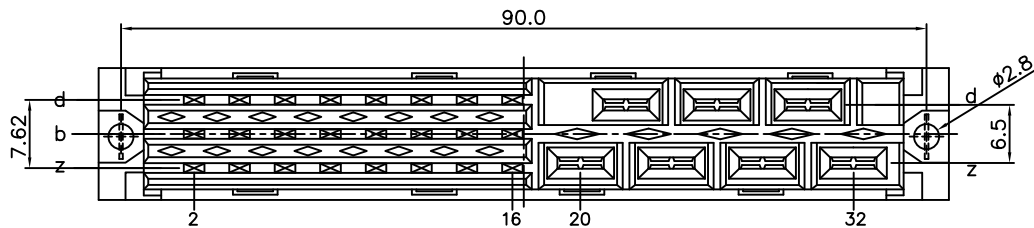


P.C. Board Layout
(Tolerance: ± 0.05)

Material:

Housing: Thermoplastic Polyester Glass Filled UL94V-0.

Contacts: Copper Alloy.

Lock: Copper Alloy.

Electrical Characteristics:

Current Rating: 5.6 AMP/15 AMP.

Dielectric Withstanding Voltage: F Type AC 1550V/ H Type AC 3100V.

Insulator Resistance: 1000M Ω min. at DC 500V.

Contact Resistance: F Type 15m Ω max/ H Type 8m Ω max. at DC 100mA.

Operating Temperature: -55°C~+125°C.

***RoHS Compliant**

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X. ± 0.50

CHECKED BY GENIUS

.X ± 0.25

UNIT / mm

SCALE 1 : 1

.XX ± 0.15

DATE

.XXX $\pm$

ANG $\pm$

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

UFH-SDZ-24+7-LF
SERIES | LEADFREE
24+7 WAY
CLIP
DIP 180°
FEMALE

DESCRIPTION: DIN41612 Mixed Style H7/F24 Female

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com