

Material:

Housing: Thermoplastic Polyester Glass Filled UL94V-0.

Contacts: Copper Alloy.

Lock: Copper Alloy.

Electrical Characteristics:

Current Rating: 5.6 AMP/15 AMP.




Dielectric Withstanding Voltage: F Type AC 1550V/ H Type AC 3100V.

Insulator Resistance: 1000M Ω min. at DC 500V.

Contact Resistance: F Type 15mΩ max/ H Type 8mΩ max. at DC 100mA.

Operating Temperature: -55°C~+125°C .

***RoHS Compliant**

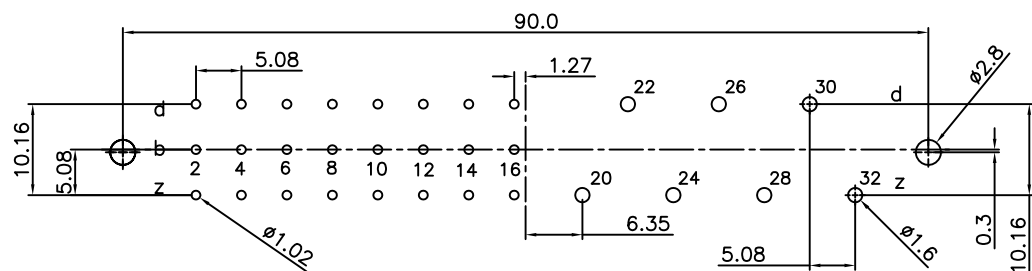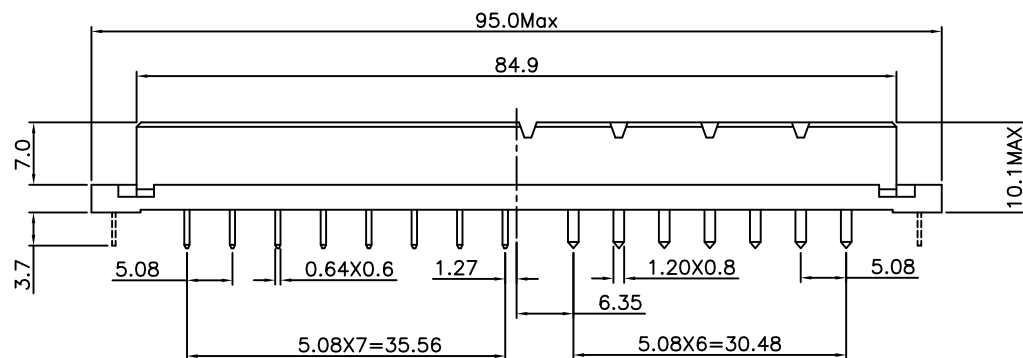

P.C. Board Layout
(Tolerance: ± 0.05)

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

 $X_i \pm 0.50$

CHECKED BY GENIUS

$$\begin{aligned} & .X \pm 0.25 \\ & .XX \pm 0.15 \end{aligned}$$

UNIT / mm

 $.XXX \pm$

DATE _____

ANG ±

PPOJECTION 

照片框

ORDER INFORMATION

UFH-SDx-24+7-LF
 SERIES 24+7 WAY LEADFREE
 FEMALE BLANK:NON CLIP
 DIP 180°

DESCRIPTION: DIN41612 Mixed Style H7/F24 Female

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com