
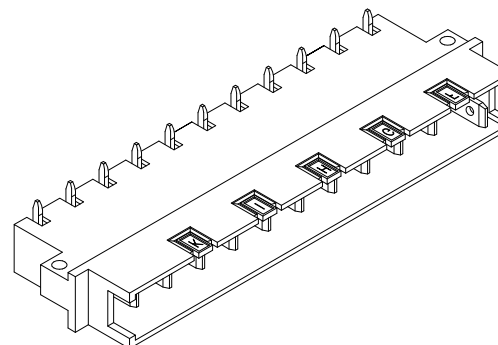


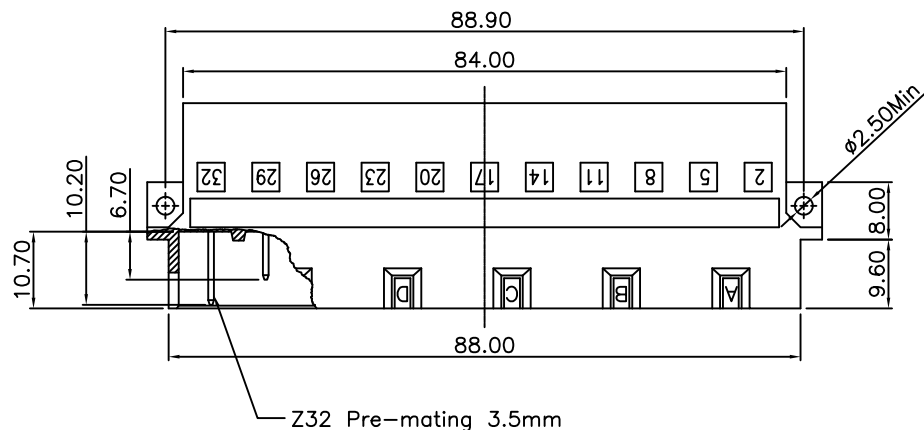




Material:

Housing: 30% Glass filled PBT UL94V-0.
Contacts: Brass.

Electrical Characteristics:

Current Rating: 15AMP.
Dielectric Withstanding Voltage: AC3100V For 1 minute.
Insulator Resistance: 1000MΩ min. at DC 500V.
Contact Resistance: 8mΩ max. at DC 100mA.
Operating Temperature: -55°C ~ +105°C.

***RoHS Compliant**

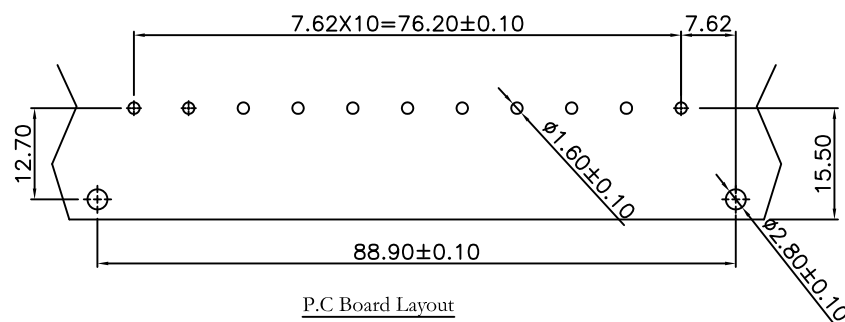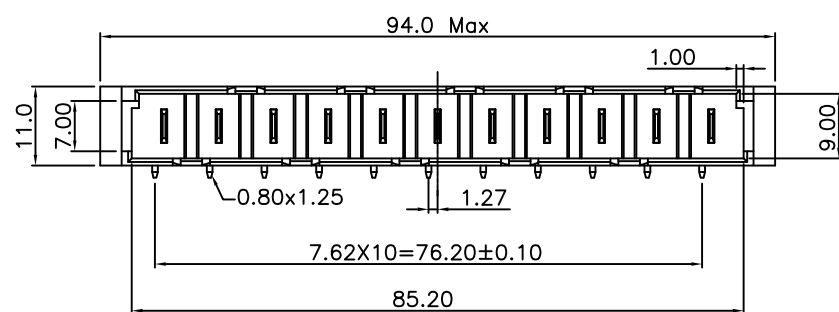

P.C Board Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X, ±
.XX, ±
.XXX, ±
ANG, ±

PPOJECTION

照片框

ORDER INFORMATION

UH-PRPM32-11-LF
SERIES | LEADFREE
11 WAY
PREMATING #32
DIP 90°
MALE

DESCRIPTION: