





Material:

Housing: 30% Glass filled PBT UL94V-0.
 Contacts: Brass.

Electrical Characteristics:

Current Rating: 15 AMP.
 Dielectric Withstanding Voltage: AC 3100V For 1 minute.
 Insulator Resistance: 1000MΩ min. at DC 500V.
 Contact Resistance: 8mΩ max. at DC 100mA.
 Operating Temperature: -55°C ~ +105°C .

***RoHS Compliant**

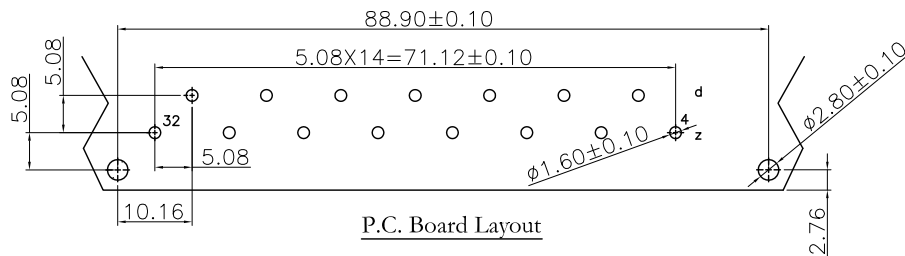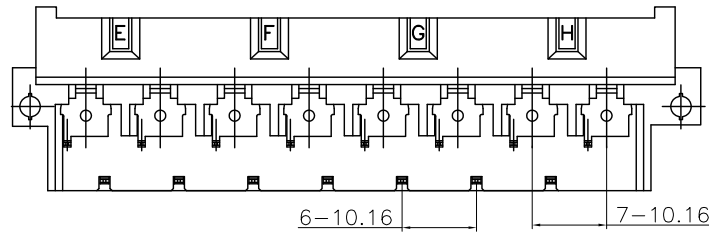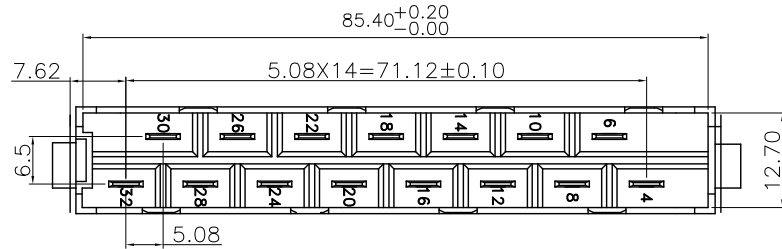

CONTACT NO.	L
z4,z8,z12,z16,z20,z24,z28	6.00
z32	7.65
d6,d10,d14,d18,d22,d26,d30	6.00

RoHS Compliant

TOLERANCES ARE



煜倫股份有限公司


www.morethanall.com

DRAWING BY CY
 CHECKED BY GENIUS
 UNIT / mm SCALE 1 : 1
 DATE
 SIZE A4 PPROJECTION

X. ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

照片框

ORDER INFORMATION

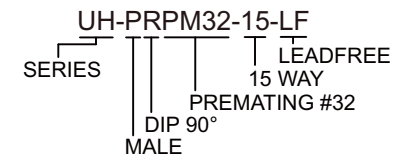

DESCRIPTION: