
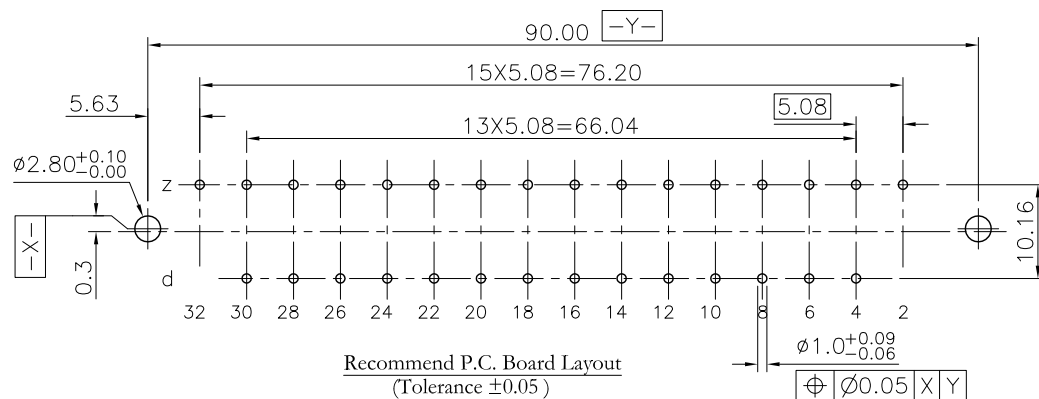

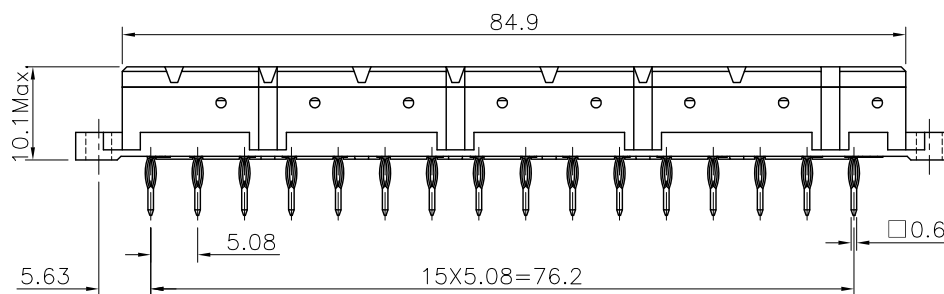



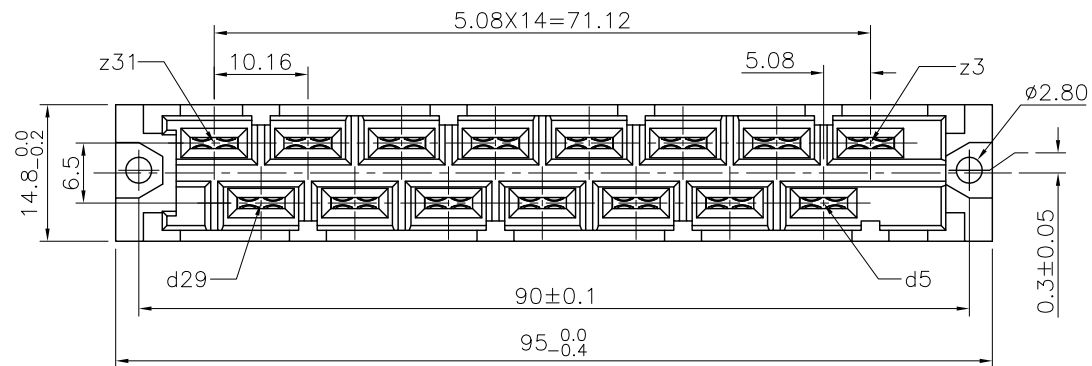

Material:

Housing: 30% Glass Filled PBT UL94V-0.

Contacts: Phosphor Bronze.

Electrical Characteristics:

Current Rating: 15 AMP.

Dielectric Withstanding Voltage: AC 3100V For 1 minute.

Insulator Resistance: 1000M Ω min. at DC 250V.

Contact Resistance: 8m Ω max. at DC 100mA.

Operating Temperature: -55°C~+105°C.

***RoHS Compliant**

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X, $\pm$
.XX, $\pm$
.XXX, $\pm$
ANG, $\pm$

照片框

ORDER INFORMATION

UH-SP-15-LF
SERIES LEADFREE
15 WAY
180° PRESS FIT
FEMALE

DESCRIPTION: