


Features:

- 2 ~ 10 circuits available
- Pin Material: Tin-plated phosphor bronze

Specification:

- Current rating: 13A (2~4P), 11A (6~10P)
- Voltage rating: 600V
- Dielectric withstanding voltage: 5000V AC/minute
- Ambient temperature rise: -55°C ~ 105°C

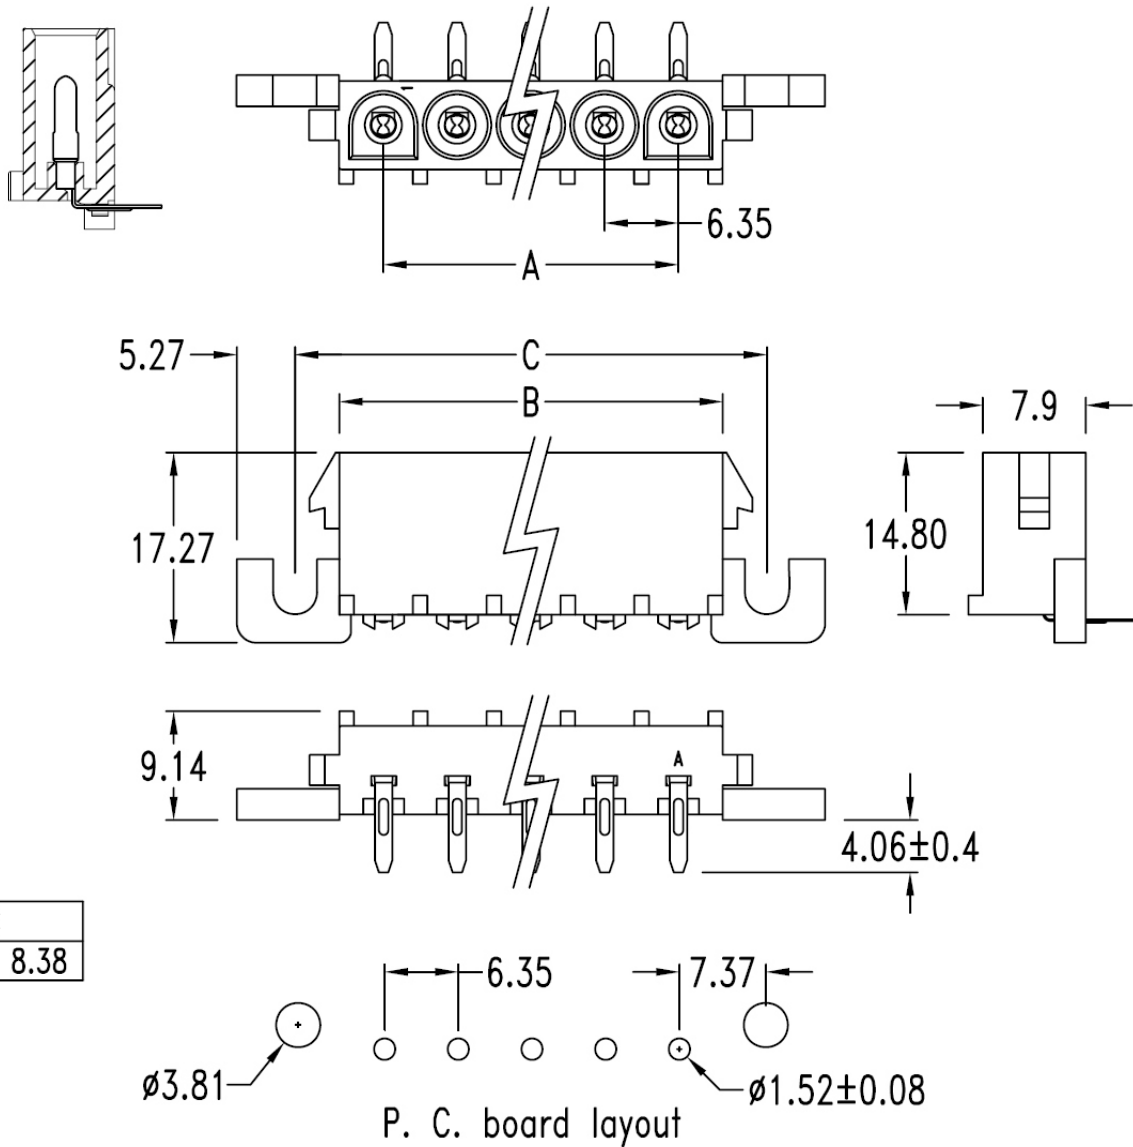

Dimensional Information (mm)

Circuits	Dim. A	Dim. B	Dim. C
N	$6.35 \times (N - 1)$	$6.35 \times N + 1.27$	$6.35 \times N + 8.38$

&& $N = 2 \sim 10$

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X.	±
.X	± 0.30
.XX	± 0.20
.XXX	±
ANG	±

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE _____

PPOJECTION

照片框

ORDER INFORMATION

UL-PRE-1Xxx-LF
SERIES
1X02:02 WAY
1X10:10 WAY
EAR
DIP 90°
MALE

DESCRIPTION: