


Features:


- Integrally molded polarization
- Material: UL 94V-0 or UL 94V-2
- Friction lock
- Standard color: Nature
- Recommended panel thickness: .030" ~ .090"(0.762 ~ 2.286mm)

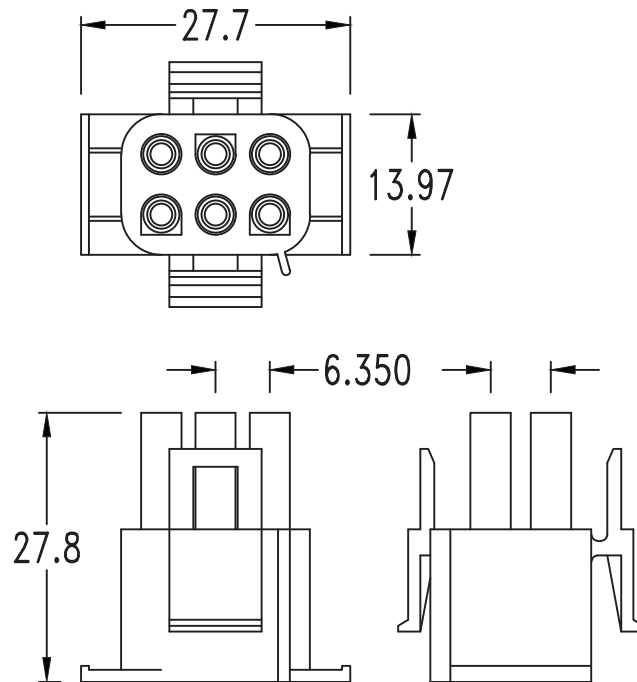

UL-S-3X02

Specifications:

- Current rating: 11A
- Voltage rating: 600V
- Insulation resistance: 1000M Ω min.
- Dielectric withstanding voltage: 5000V AC/minute
- Ambient temperature range: -55°C ~ 105°C

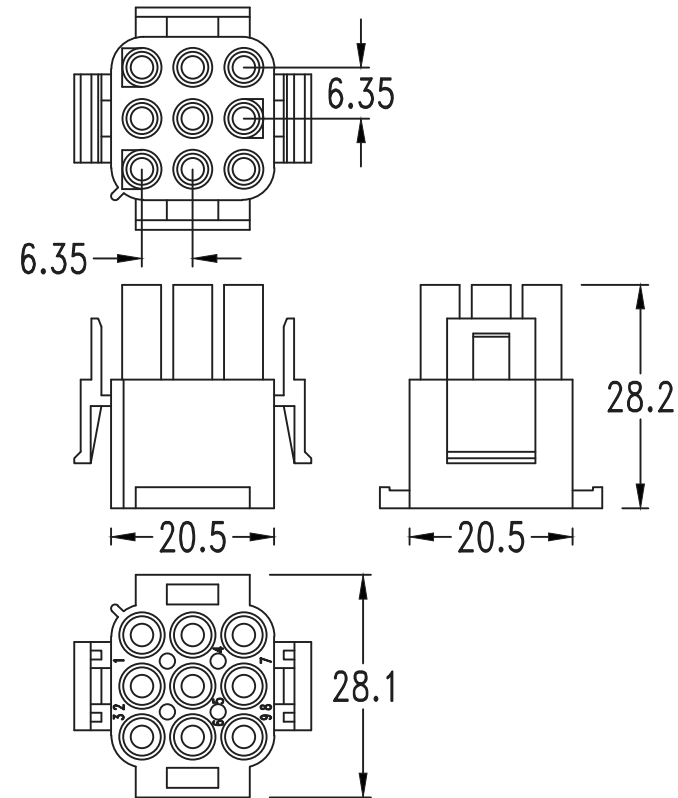

UL-S-3X03

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
.X $\pm$ 0.40
.XX $\pm$ 0.25
.XXX $\pm$ 0.08
ANG $\pm$

PPOJECTION

ORDER INFORMATION

UL-S-3Xxx-LF
SERIES | LEADFREE
3X02:06WAY
3X03:09WAY
FEMALE HOUSING

DESCRIPTION: