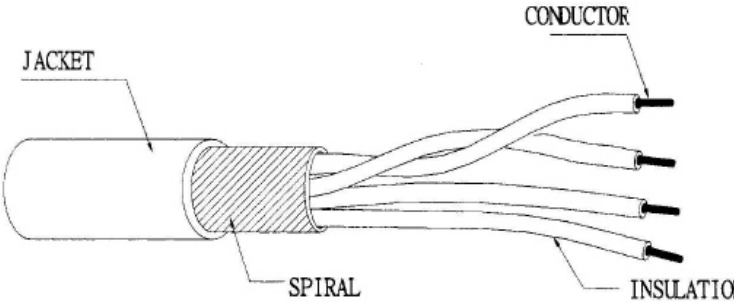


SPECIFICATION: UL2725 28AWG/1PR+28AWG/2C+AEB CABLE				PART NO	
ITEM		SPECIFICATION		CONSTRUCTION D.W.G	
CONDUCTOR	AWG	28AWG (1PR)	28AWG (2C)		
	MATERIAL	Tinned Stranded Copper	Tinned Stranded Copper		
	COND.SIZE	7/0.12TC	7/0.12TC		
INSULATION	MIN.AVG.THICK	0.15mm	0.16mm		
	MATERIAL	PP	SR-PVC		
	I.D	0.62±0.05mm	0.65±0.05mm		
SPIRAL	MATERIAL	Tinned Copper			
	SIZE	52±2/0.10			
	COVERING	100%			
JACKET	MIN.AVG.THICK	0.60mm			
	MATERIAL	80°C PVC			
	COLOR	TRANSPARENT			
	O.D	3.50±0.10mm			
COLOR CODE					
28AWG (1PR): 1.WHIET 2.GREEN					
28AWG (2C): 1. RED 2.BLACK					
ELECTRICAL CHARACTERISTICS		PHYSICAL PROPERTILES			
1.Rating TEMP 80°C VOLTAGE 30V		1.PP Tensile Strength Unaged:3000psi Aged:75%			
2.Conductor Resistance:AT 20°C MAX		Elongation Unaged:1500% Aged:70%			
30AWG:348Ω /km		2. SR-PVC Tensile Strength Unage:3000psi Aged:70%			
3.Insulation Resistance:		Elongation Unaged:100% Aged:70%			
AT 20°C MIN 100 MΩ /km					

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

UL2725-0428-xxx-LF

SERIES

LEADFREE

LONG

28 AWG

04 WAY

DESCRIPTION: