


Material:

Contact: Copper Alloy With Gold Plated.

Lock Link: Copper Alloy With Nickel Plated.

***RoHS Compliant**

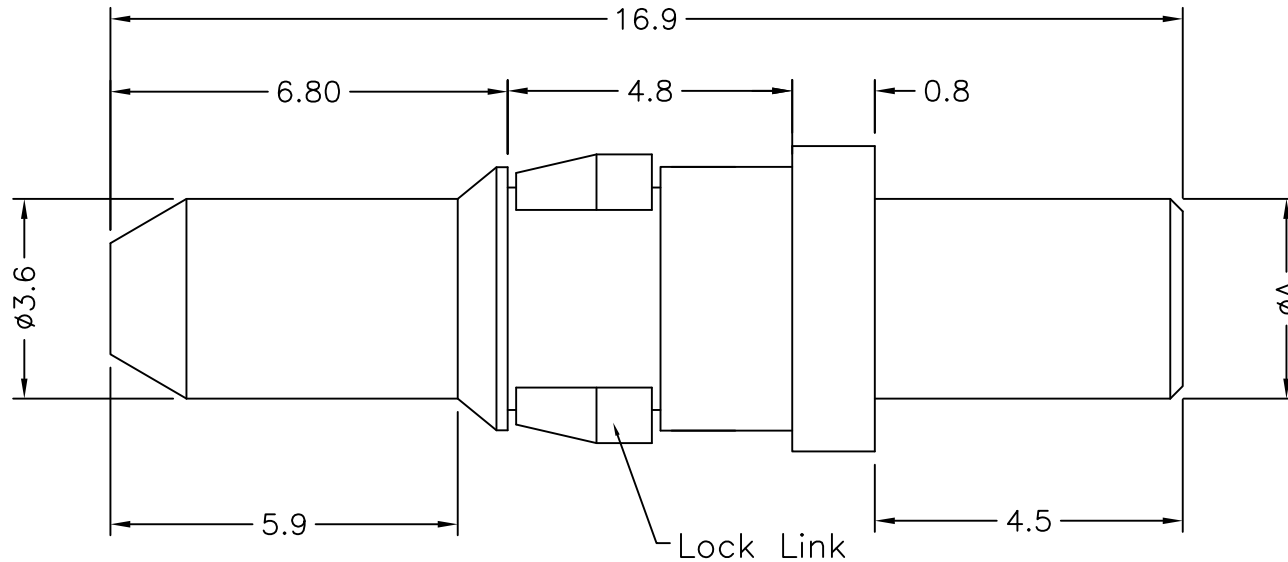

Current Rating (Amps)	Dimension
	ϕA
40	3.75
30	3.17
20	2.85
10	1.70

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. \pm 0.35

.X \pm 0.25

.XX \pm 0.15


.XXX \pm

ANG \pm

PPOJECTION



ORDER INFORMATION



DESCRIPTION: Power Pin Male Straight Type