
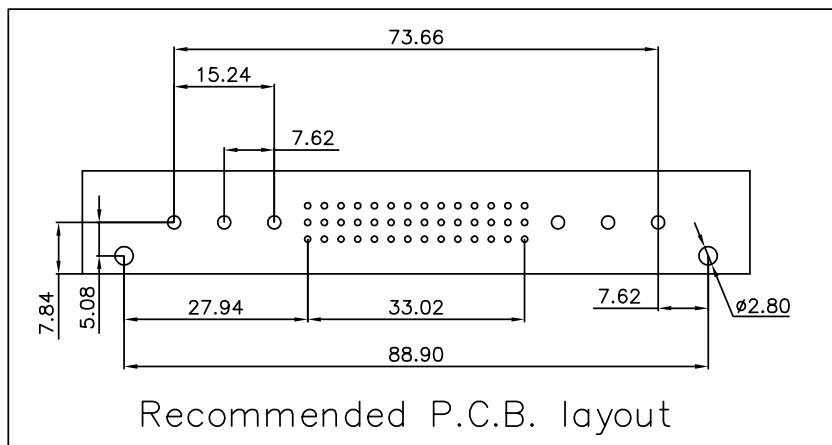


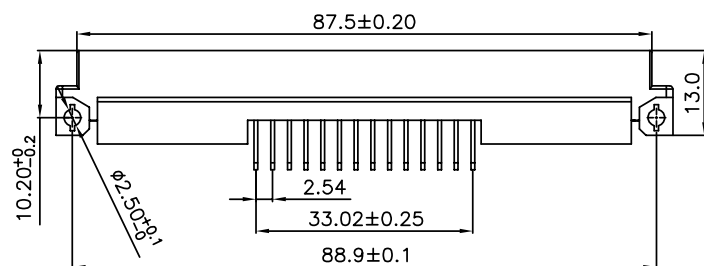


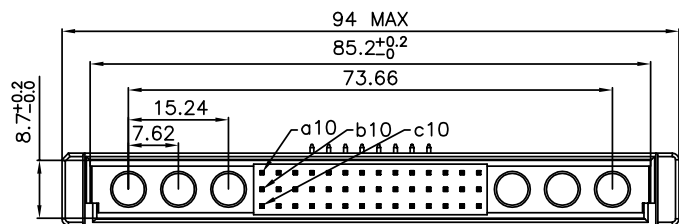

DIN 41612 EUROCARD CONNECTORS Right Angle Male Type M Connectors

Technical data

EURO DIN 41612:

Housing:

Contact:

Plating:

Signal+Power

PBT & 30%Glass Fiber(UL94V-0)

Male : Brass

2U"Au plated on contact area,
Tin-plated on tail

Operating temperature:

-55°C~+105°C

Contact resistance:

20m(ohm)max.

Insulator resistance:

10⁶ M(ohm)min.

Current rating:

2 AMP

Withstanding voltage:

AC 1000V for 1 minute

Insertion force:

48pin max.45N 32pin max.30N

Withdrawal force:

0.15 N min.per individual contact

Contact Rating:

Class 3

RoHS Compliant

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X. ± 0.30

CHECKED BY GENIUS

.X ± 0.25

UNIT / mm

SCALE 1 : 1

.XX ± 0.15

DATE

.XXX ± 0.05

ANG ±

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

UM-PR-42+6-LF
SERIES LEADFREE
42+6 WAY
DIP 90°
MALE

DESCRIPTION:

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com