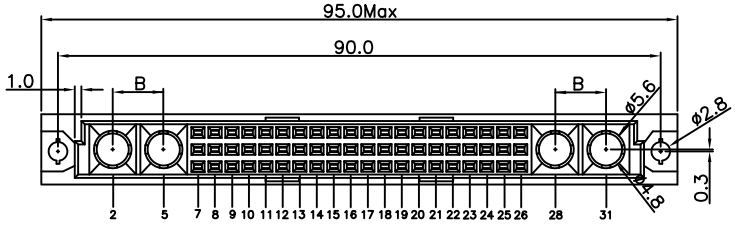

Material:
Housing: 30% Glass filled PBT UL94V-0.
Contacts: Phosphor Bronze.
Coaxial or Power: Cu Alloy.

Electrical Characteristics:
Current Rating: 2 AMP.
Dielectric Withstanding Voltage: AC 1000V For 1 minute.
Insulator Resistance: 1000MΩ min. at DC 500V.
Contact Resistance: 30mΩ max. at DC 100mA.
Operating Temperature: -55°C ~+105°C .
*** RoHS Compliant**

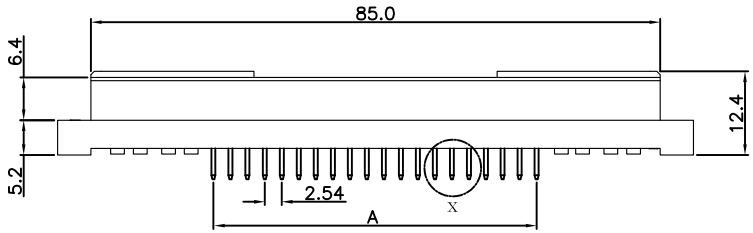





Dip Type

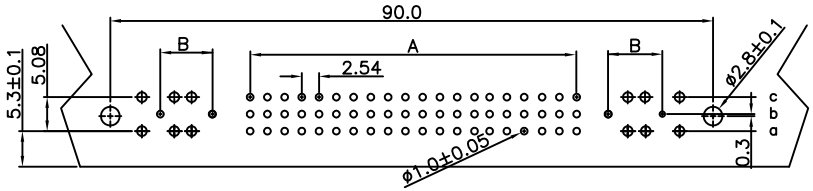

P.C. Board Layout (Coaxial)

Dimension	
A	(2.54 x No of Contact)/3-2.54
B	(7.62 x No of Coaxial)/2-7.62

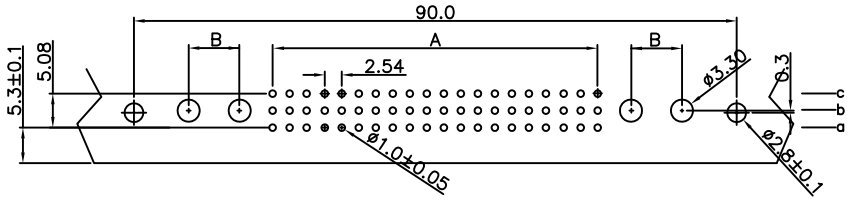

P.C. Board Layout (Power)

RoHS Compliant

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

DRAWING BY CY	
CHECKED BY GENIUS	
UNIT / mm	SCALE 1 : 1
DATE	
SIZE A4	PPOJECTION

TOLERANCES ARE
X. ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

UM-SD04-60+4-LF

- SERIES
- FEMALE
- DIP 180°
- 4.0mm LENGTH
- 60+4 WAY
- LEADFREE

DESCRIPTION: