



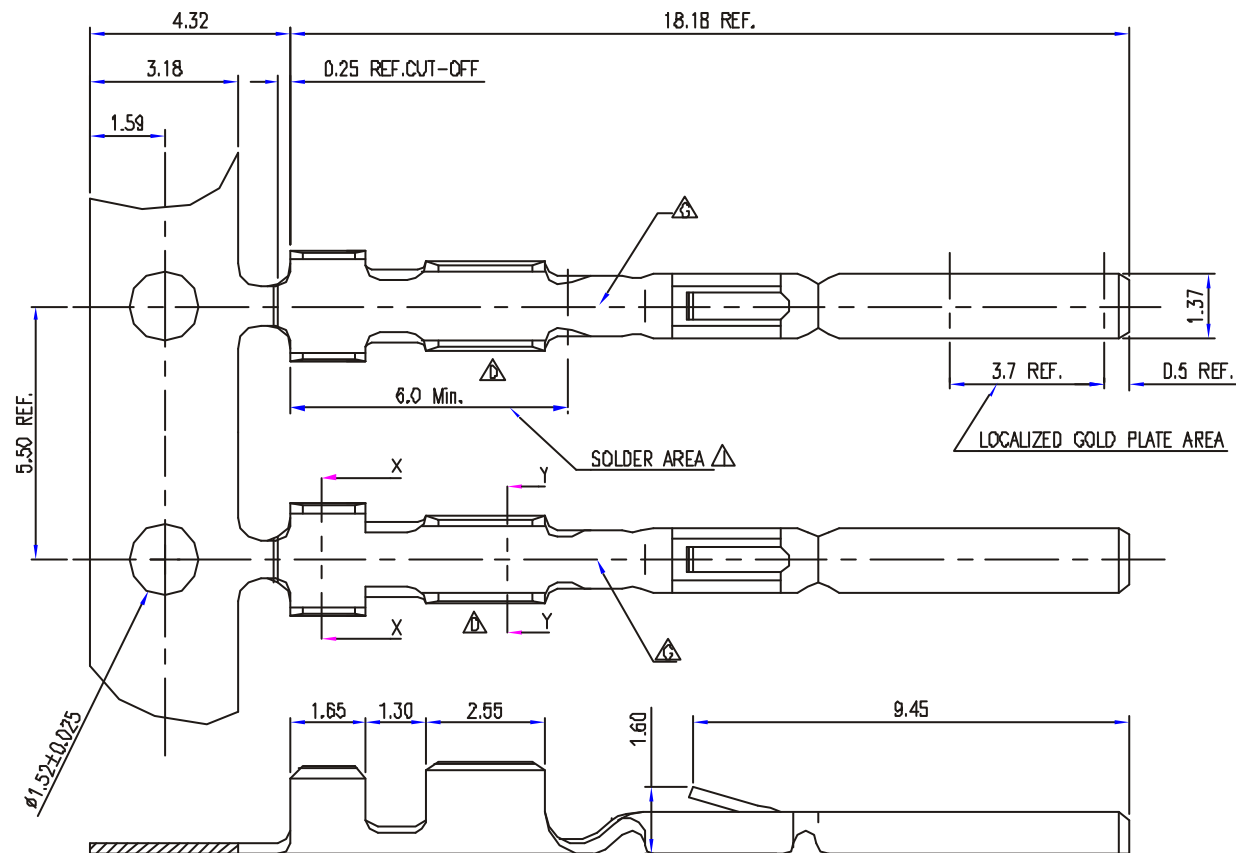

NOTES :

- 1.0. MATERIAL : COPPER ALLOY
- 2.0. FINISHES : SEE TABLE B:
- 3.0. PRODUCT NUMBER : REFER TO "TABLE B"
- 4.0. RECOMMENDED APPLICABLE WIRE SIZE : REFER TO "TABLE A"
- 5.0. PACKAGE : 10K pcs/Reel

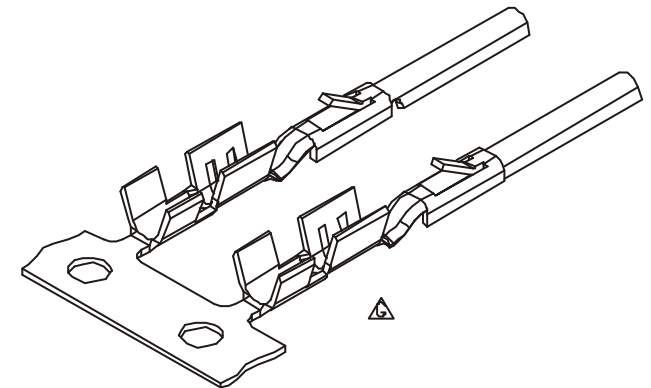

SCALE 5:1

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

USB-MT-26-LF
SERIES | LEADFREE
26:26-28 AWG
MALE TERMINAL

DESCRIPTION: PLUG CONTACT, CRIMP SNAP-IN TYPE

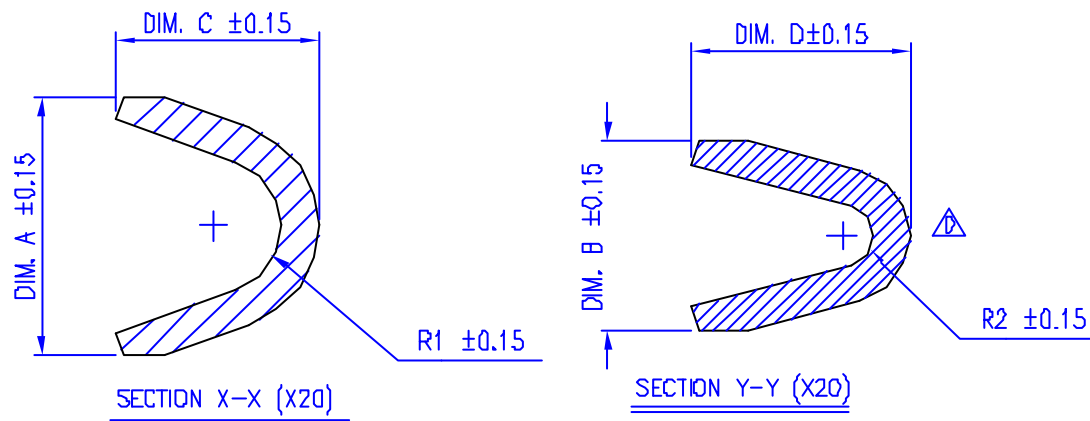



TABLE A:

TYPE OF CONTACT	WIRE RANGE	INSULATION RANGE	DIMENSION					
			DIM. A	DIM. B	DIM. C	DIM. D	R1	R2
USB-MT-26	26-28 AWG	ø0.79-ø1.05 mm	1.72	1.27	1.35	1.45	0.45	0.20

DIRECTION : TYPE D



DETAIL D(X10)

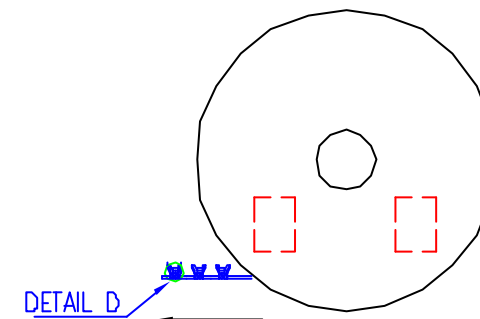

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

USB-MT-26-LF
SERIES | LEADFREE
26:26-28 AWG
MALE TERMINAL

DESCRIPTION: PLUG CONTACT, CRIMP SNAP-IN TYPE