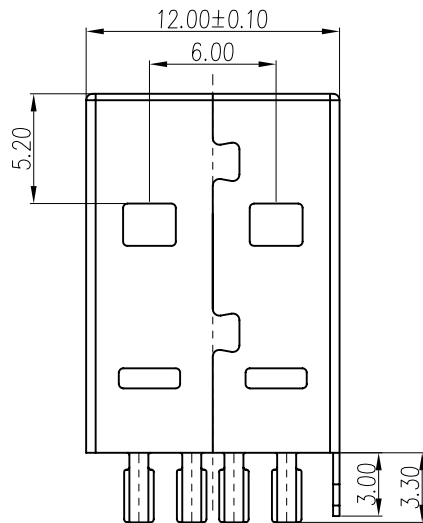
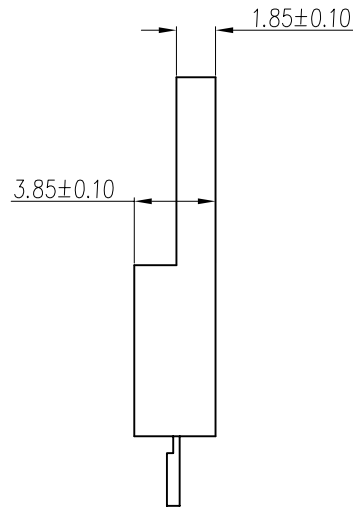
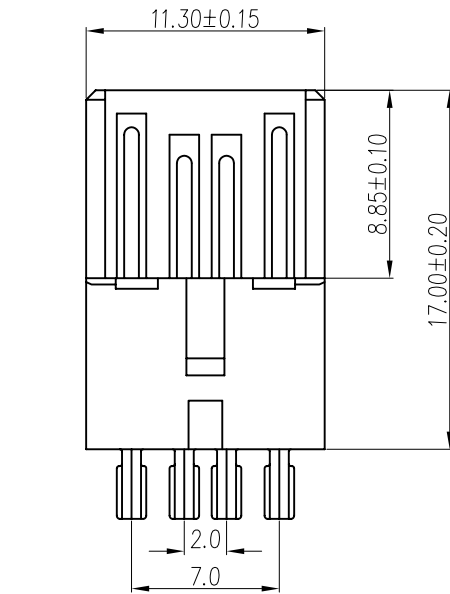


Note:

1.Material:

1.1 Insulator: P.B.T UL 94-V0 rated.

1.2 Contact: Brass, $t=0.25\text{mm}$.

1.3 Shell: Cold rolled steel, $t=0.30\text{mm}$.

2.Specification:

2.1 Current rating: 1 A Max.

2.2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.

2.3 Contact resistance: 30 mΩ Max.

2.4 Insulation resistance: 1000 MΩ Min at DC 500V.

2.5 Temperature range: $-55^{\circ}\text{C}\sim+105^{\circ}\text{C}$

3.Finishes:

3.1 Contacts:Gold flashed 1u",3u",5u",10u",15u",30u".

3.2 Shell: Nickel,tin plated

3	Shell	1	Cold Rolled Steel	T=0.30mm	Nickel Plated
2	Contact	4	Brass	T=0.25mm	Gold Flashed
1	Housing	1	P.B.T	UL 94-V0	Black/White
No.	Part Name	Q'ty	Material	Remarks&Thickness	Finish

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ± 1°

PPOJECTION

照片框

ORDER INFORMATION

USB-PMxx-4A-LF
SERIES T LEADFREE
4 PIN A TYPE
BK:BLACK
WH:WHITE
MOLDING
MALE

DESCRIPTION: USB-A公焊線式短鐵殼