


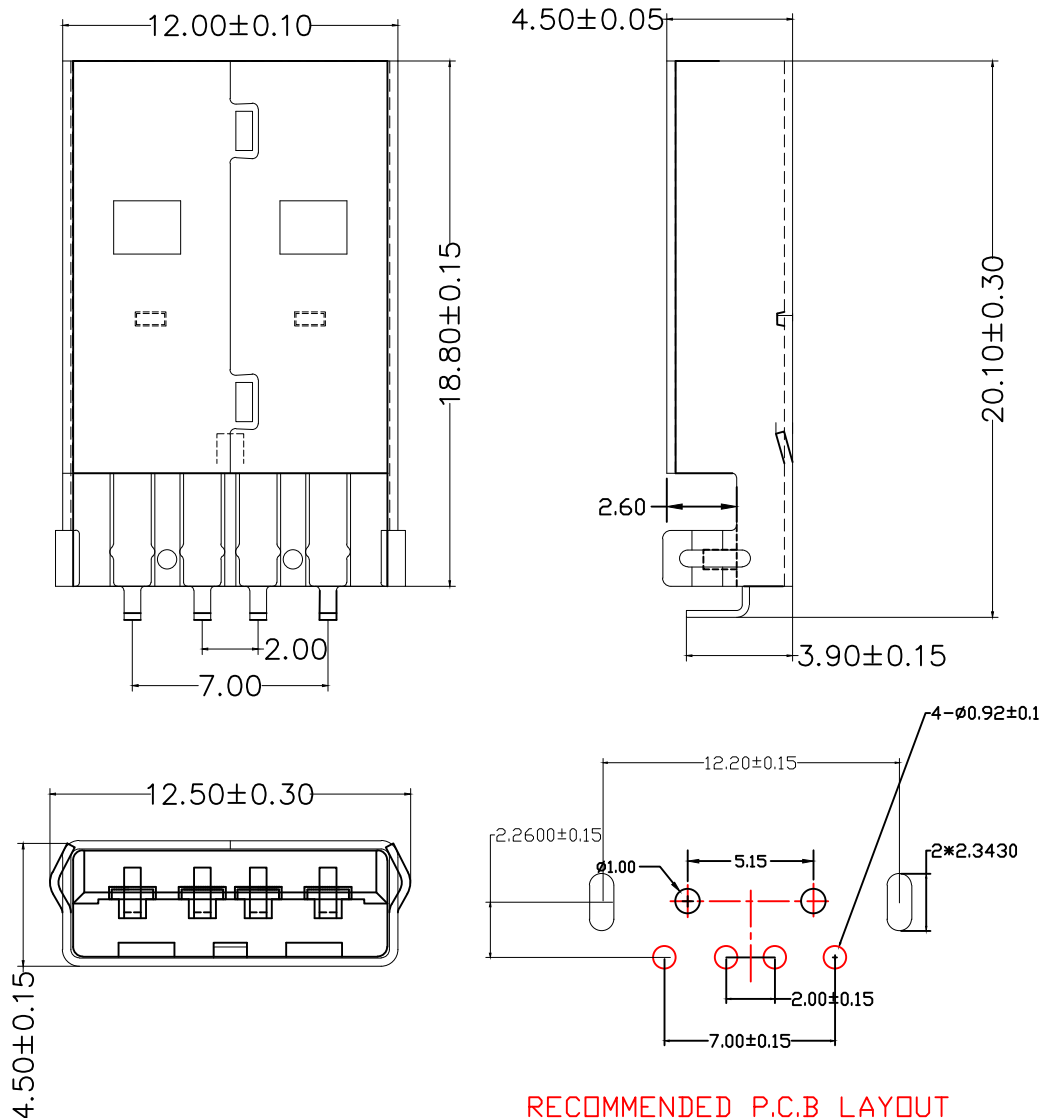

RECOMMENDED P.C.B LAYOUT

产品规格说明: (specifications)
电器特性: (Electrical characteristics)

- 最大值30毫欧: (30 milliohms MAX)
2. 耐电压: (Dielectric Withstanding Voltage:)
500 伏特交流电 (500V AC AT Sea Level)
3. 绝缘阻抗: (Insulation Resistance:)
最小值1000兆欧姆 (1000 mega-ohms MIN)

材料: Material:

1. 塑胶: ☐ (Housing) : High Temperature Inertplastics, U1 94V-0
☐ : Black ☐ : White ☐ : 其它
☐ : PBT ☐ : 耐高温塑胶 LCP ☐ : 其它

2. 端子: (Contact): ☐ C2680 ☐ C5191

3. 外壳: (Shell): ☐ C2680 ☐ SPCC-SD ☐ SPCC-SB

电镀: (Finish):

1. 端子: (Contact): Plated Gold in Mating Area:
Tin On Solder Tails
接触点镀金, 脚镀锡。

接触点镀金 ☐ 1u' ☐ 3u' ☐ 5u' ☐ 15u' ☐ 30u' 脚镀锡。

2. 外壳: (Shell): Nickel Plating 镀亮镍

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.15

.X ± 0.10

.XX ± 0.05

.XXX ± 0.03

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

USB-PRK1922xx-4A-LF
SERIES T T T T LEADFREE
MALE T T T T 4 PIN A TYPE
DIP 90° BK:BLACK
KINK WH:WHITE
2.26mm
LONG 18.8mm

DESCRIPTION: