
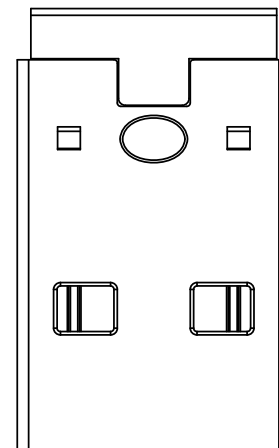
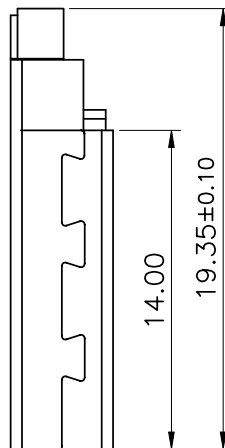


PARTS NAME 零件名稱	Q'TY 數量	MATERIAL 材質	FINISH/REMARK 處理/備註
HOUSING	1	SYNTHETIC RESIN	White
CONTACT	4	COPPER ALLOY	1u"Gold on contact area 100u" Tin on solder tails base Nickel: 50u"
SHELL	1	HIGH-CARBONSTEEL	Ni:60u"

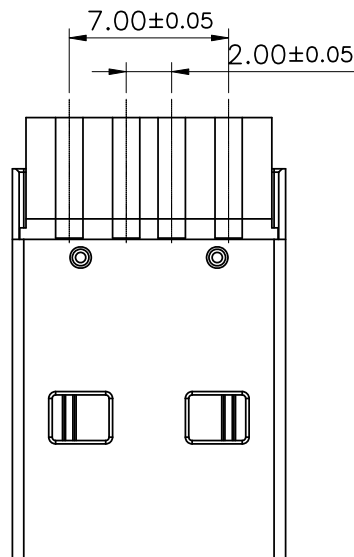

SPECIFICATION  
STANDARD DATA  
Rating current:1.5A  
ELECTRICAL  
Insulator resistance: 1000M ohms Min. @ 250 VDC  
Withstanding voltage: 500 VAC / minute  
Contact resistance: 30 m ohms Max.  
MECHANICAL  
Mating force: 35N(3.43kgf) Max.  
Unmating force (Without lock): 10N(0.98kgf)Min.  
Durability: 1500 cycles Min

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X. ± 0.50

.X ± 0.30

.XX ± 0.20

.XXX ±

ANG ± 5°

PJECTION

照片框

ORDER INFORMATION

USB-PSWH-4C-LF  
SERIES | LEADFREE  
WHITE  
SOLDER  
MALE  
4 PIN C TYPE

DESCRIPTION: USB 2.0 A Type 雙向插 公頭 焊線式