
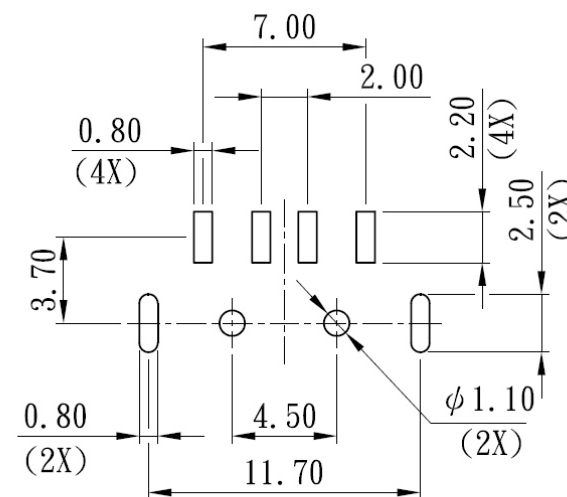

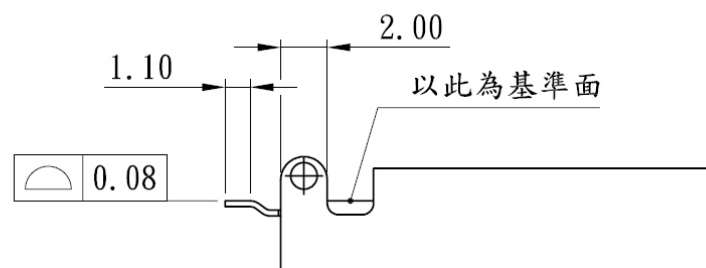
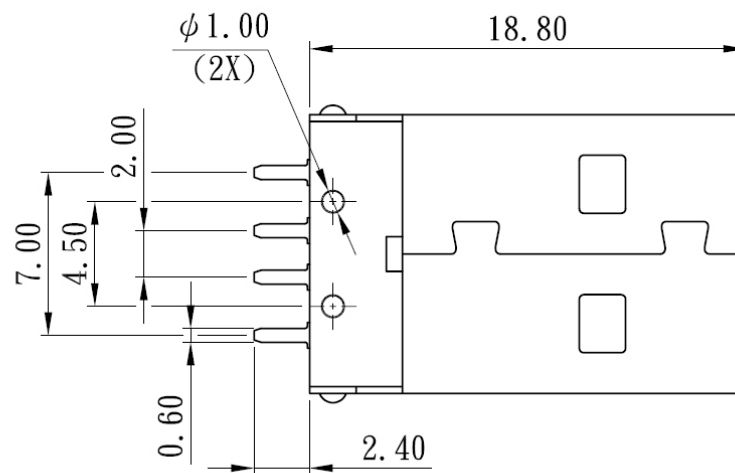


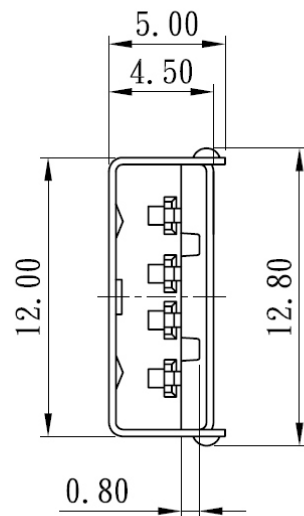

RECOMMENDED PCB LAYOUT

NOTE:

1. MATERIAL

INSULATION: NYLON

CONTACT PIN:BRASS(C2680-H) T=0.25mm.

SHELL:SPCC T=0.3mm.

2. PLATING

CONTACT PIN:SELECTIVE GOLD PLATED, 80U" TIN/LEAD IN SOLD TAILS, 50U" MIN NICKLE. UNDERPLATED OVER ALL

SHELL:NICKEL PLATING FOR ALL 80U" . RATING

VOLTAGE RATING:30V AC

CURRENT RATING:1A MAX

3. ELECTRICCAL CHARACTERISTICS

CONTACT RESISTANCE:30m ohms MAX

INSULATION RESISTANCE:100M ohms Min

DIELECTRIC WITHSTANDING VOLTAGE:500V DC AT MINUTE.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

USB-PW-4A-LF
SERIES T LEADFREE
4 PIN A TYPE
90°SMT
MALE

DESCRIPTION: