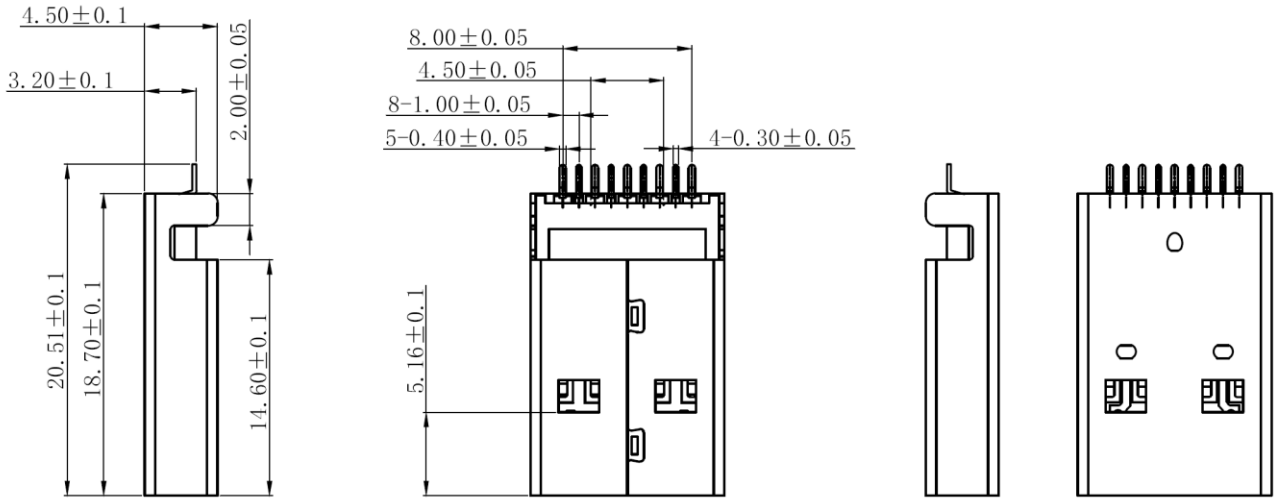

NOTE:
1.MATERIAL:
- 1.1 INSULATOR:LCP UL 94V-0
- 1.2 CONTACT:BRASS(T=0.20mm)
- 1.3 SHELL:SPCC(T=0.30mm)

2.ELECTRICAL CHARACTERISTICS;
- 2.1 CONTACTRESISTANCE:30mΩ Max
- 2.2 CONTACT CURRENT RATING:1.5A
- 2.3 DIELECTRIC WITHSTANDING VOLTAGE:500 V R.M.S.
- 2.4 INSULATION RESISTANCE 100 MEGOHMS Min
- 2.5 OPERATING TEMPEROTURE:-40°C 85°C

3 MECHANICAL CHARACTERISTICS:
- 3.1 MATING FORCE:35 N Max
- 3.2 UNMATED FORCE:10 N Min INITIAL; 8 N Min AFTER TEST
- 3.3 DURABILITY:5,000 CYCLES

4.PLATING
- 4.1 TERMINAL CONTACT:GOLD PLATING ALL OVER 50u" MIN NICKEL AND 80u"MIN Matte Tin ALL OVER 50u" MIN NICKEL IN SOLDER AREA
- 4.2 SHELL:50u"MIN. NICKEL ALL OVER

Pin #	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	GND
5	TueB`TRY.
6	TueB`TRY,
7	GND_DRAIN
8	Stda_SSTX-
9	Stda_SSTX+
Shell	Shield

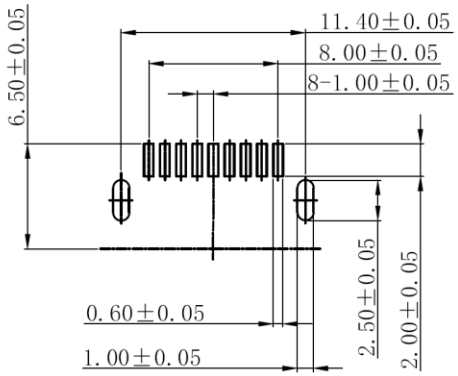



PCB LAYOUT

RoHS Compliant

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

DRAWING BY CY	
CHECKED BY GENIUS	
UNIT / mm	SCALE 1 : 1
DATE	
SIZE A4	PPOJECTION

TOLERANCES ARE
X. ±
.X ± 0.50
.XX ± 0.30
.XXX ± 0.20
ANG ± 5°

照片框

ORDER INFORMATION

USB-PW32PXBL-9A-LF
- SERIES
- MALE
- 3.2mm
- 90°SMT
- BLUE
- NON POST
- 9 PIN A TYPE
- LEADFREE

DESCRIPTION: