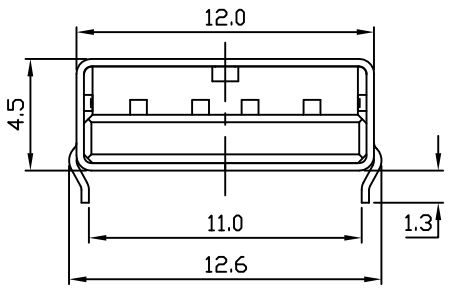

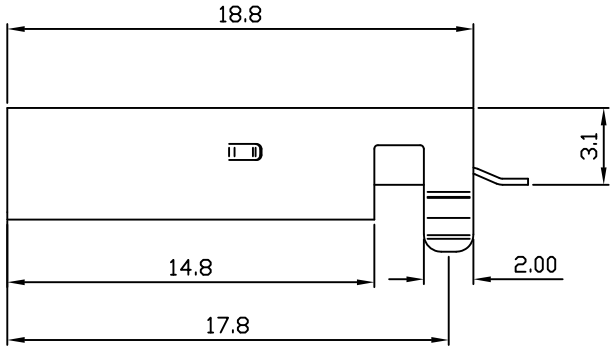

NO.	NAME	MATERIAL	FINISH
1	HOUSING	Thermoplastic	
2	TERMINAL	Copper Alloy	Gold-Tin Plated
3	SHELL	Alloy	Ni Plated

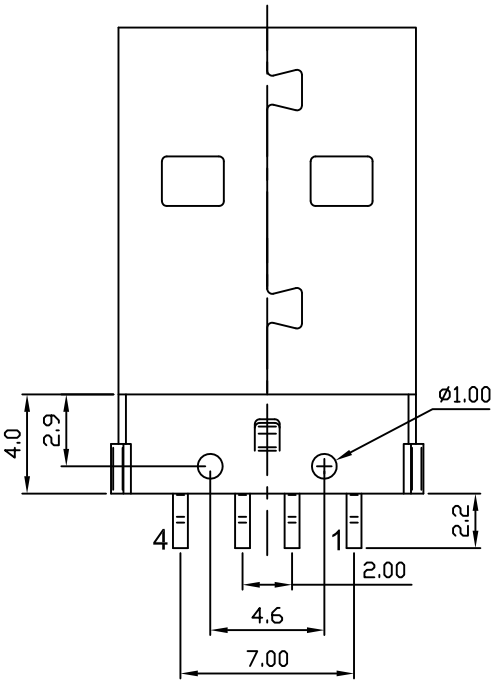

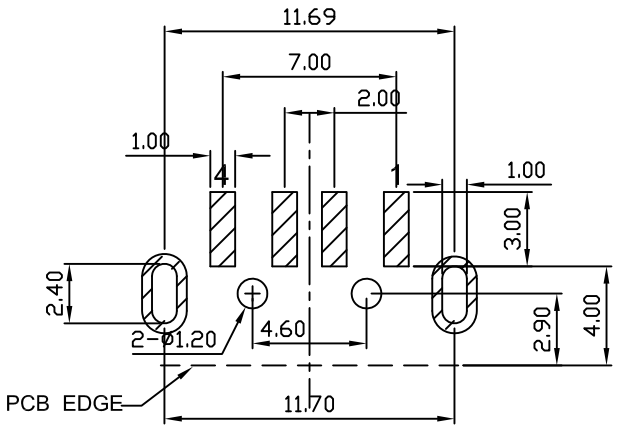

RECOMMENDED PCB LAYOUT
TOP VIEW
TOLERANCE:±0.05mm
PCB THICKNESS: 1.20±0.05mm

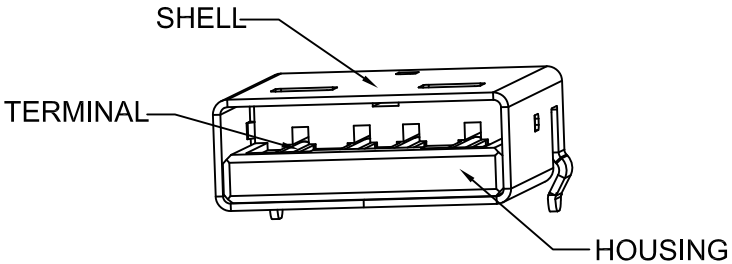

RoHS Compliant

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

DRAWING BY CY	
CHECKED BY GENIUS	
UNIT / mm	SCALE 1 : 1
DATE	
SIZE A4	PPOJECTION

TOLERANCES ARE
X. ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.075
ANG ±

照片框

ORDER INFORMATION

USB-PWBK-4A-LF
SERIES
MALE
90°SMT
BLACK
4 PIN A TYPE
LEADFREE

DESCRIPTION: USB A TYPE PLUG