
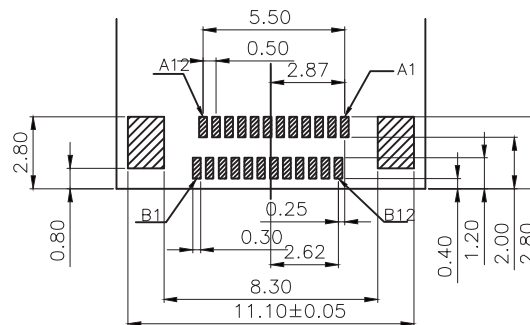

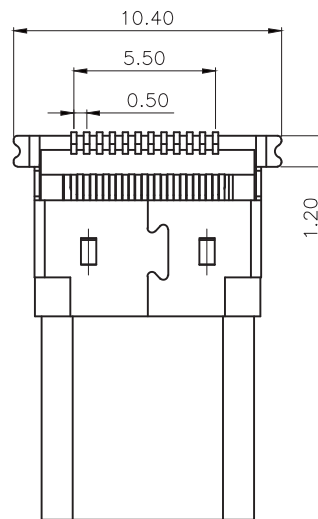
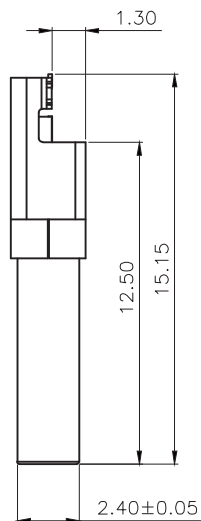
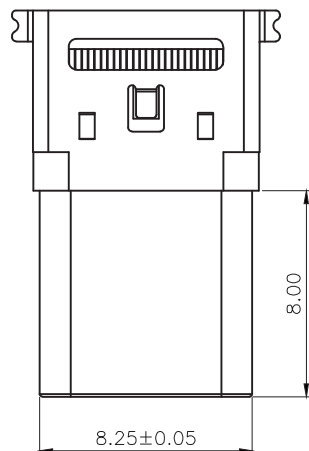




5(±200(1'3&%/ \$<287
7+,&.1(6625PP

- NOTES: 1.MATERIAL:
MOLDING: LCP UL94 V-0
CONTACT: COPPER ALLOY.
GOLD PLATED Min ON CONTACT AREA, 100u"
Min TIN (LEAD FREE) ON SOLDER AREA,
SHELL: SUS304-H, T=0.30±0.03mm
50u" NICKEL PLATING OVER ALL.
SHILD: SUS304-H, T=0.12±0.03mm
2.MECHANICAL:
INSERTION: 5~20N.
EXTRACTION: 8~20N AFTER TEST.
DURABILITY: 10000 CYCLES
3.ELECTRICAL:
CURRENT: 5A FOR VBUS;
1.25A FOR GND PIN.
0.25A FOR OTHER.
VOLTAGE: 20 V MAX
WITHSTANDING VOLTAGE: 100V AC R.M.S.
CONTACT RESISTANCE: 40mΩ MAX.
INSULATION RESISTANCE: 100MΩ MIN.
4.ENVIRONMENTAL
TEMPERATURE RANGE -25°C ~ +85°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X ± 0.30
.X ± 0.25
.XX ± 0.20
.XXX ± 0.10
ANG ± 5°


PPOJECTION

照片框


ORDER INFORMATION

USB-PWFER-24C-LF
SERIES REEL
MALE EAR
OFFSET 90°SMT
LEADFREE
24 PIN C TYPE


DESCRIPTION: USB C TYPE SMT

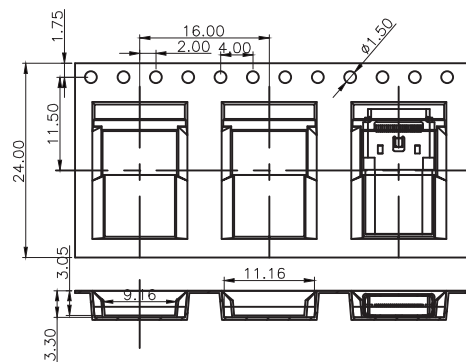


① 產品入載帶示意圖




② 捲盤貼標籤示意圖



③ 10盤產品疊層示意圖

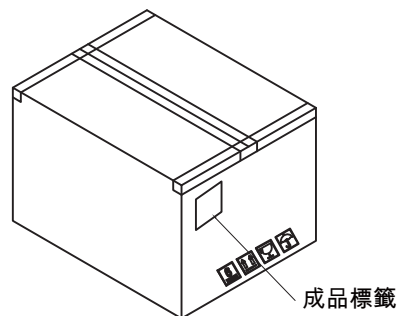


⑥ 外箱封箱示意圖

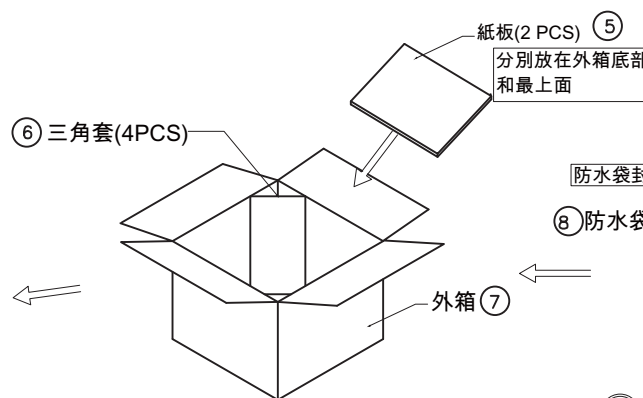

⑤ 產品外箱示意圖

圖四

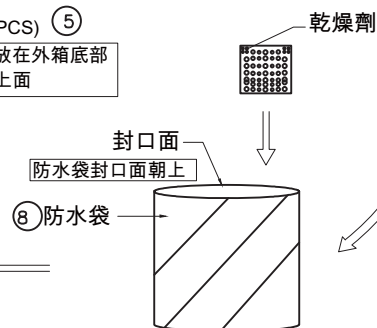

④ 7盤產品入防水袋示意圖

圖三

包裝說明:

1. 將檢驗好的成品;SMT朝下放入載帶底部;每卷裝1000PCS產品;具體如圖一所示
2. 將包裝好的產品;每盤必需貼上內標籤;具體如圖二所示
3. 將貼好內標籤的產品每10盤疊一層裝入防水袋中並加一包干燥劑;裝好後將防水袋封好;具體如圖三圖四所示
4. 先將1pcs平卡放入紙箱底部;然後將裝好產品的防水袋裝入紙箱中;防水袋熱熔封口, 封口面需朝上;並將4PCS三角套分別裝入4個角;如圖五所示
5. 裝好後將1pcs平卡放入紙箱最上面並封好紙箱及貼好相關標籤;具體如圖六所示;
(產品包裝的標籤, 如客戶有要求, 請按客戶要求包裝出貨)
6. 載帶前面留30PCS空格, 後面留20PCS空格
7. COVER與CARRY剥离力:50-125g, 速度:300mm/分鐘左右, 剥离角度:165° -180°

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.30

.X ± 0.25

.XX ± 0.20

.XXX ± 0.10

ANG ± 5°

PPOJECTION

照片框

ORDER INFORMATION

USB-PWFER-24C-LF
SERIES REEL
MALE EAR OFFSET
90°SMT
LEADFREE
24 PIN C TYPE

DESCRIPTION: