
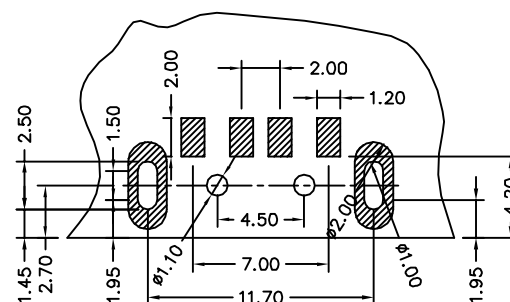

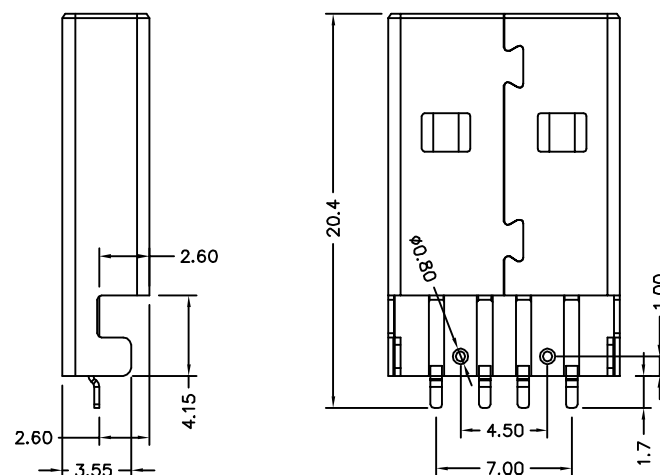


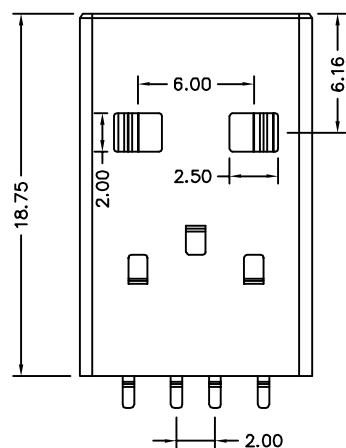


NOTE

- A. Insulator : High temp. plastic ,UL 94V-0 .
- B. Contact : Brass T=0.25mm.
- C. Contact Plating : Gold Plated on Contact Area.
- D. Shell : Steel SPCC T=0.30mm
- E. Shell Plating : Nickel Plated.

Electrical :

- A. Voltage: 30VAC(rms).
- B. Current: 0.5A
- C. Contact Resistance: 30m maximum
- D. Insulation resistance: 1000M minimum
- E. Dielectric withstanding voltage: 750V AC
- F. Temperature: -40°C to 60°C
- G. Durability: > 1500 cycles.

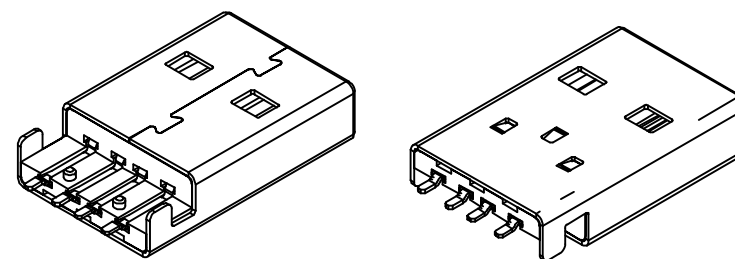

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

USB-PWFMBK-4A-LF
SERIES | LEADFREE
MALE | 4 PIN A TYPE
METAL | BK:BLACK
OFFSET
90°SMT

DESCRIPTION: