

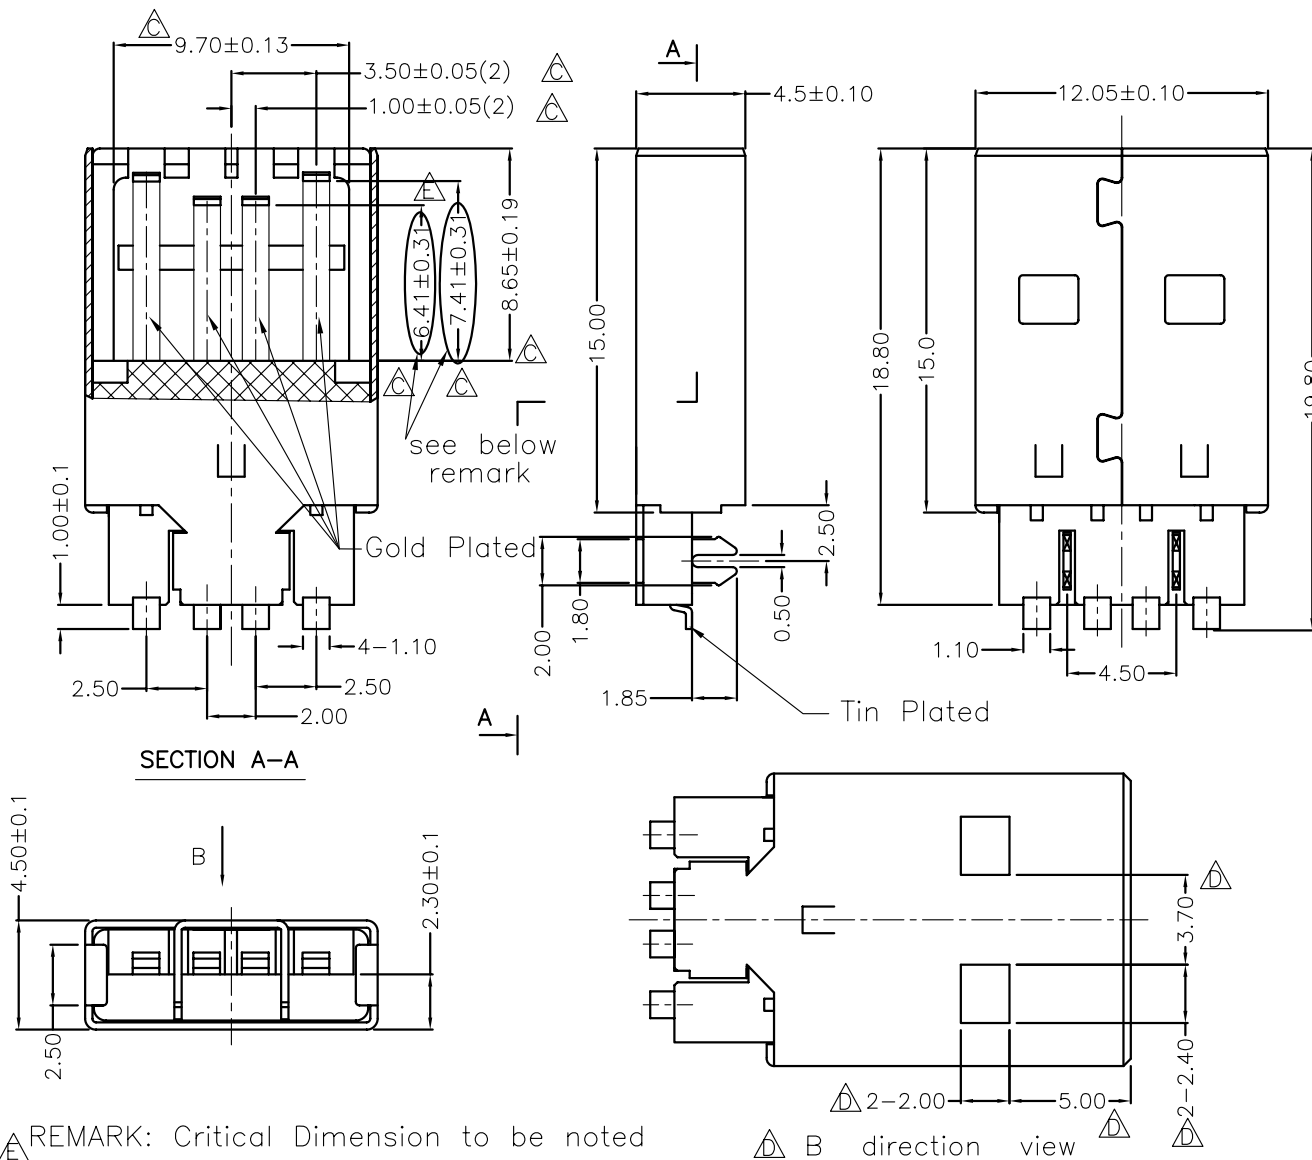


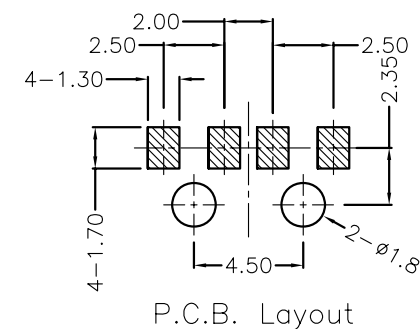

Specifications:

Current Rating: 1.0A AC/DC
 Voltage Rating: 30V AC/DC
 Contact Resistance: 20m Ohm. Max.
 Insulation Resistance: 1000M Ohm. Min.
 Withstanding Voltage: 750V AC/Minute
 Operating Temperature Range: -40°C To +105°C
 Materials:
 Insulator: High Temp. Plastic (LCP, UL 94V-0)
 Insulator Color: Black
 Contact: Brass
 Plating: Gold Plated in Contact Area,
 Tin Plated on Solder Tails.
 Shell: Nickel Plating
 Mechanical Characteristics
 Insertion force rating: 1.0~2.0kg/pc
 Withdrawal force rating: 0.8~2.0kg/pc



照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
 .X ± 0.25
 .XX ± 0.20
 .XXX ± 0.15
 ANG ±

ORDER INFORMATION

USB-PWZBK-4A-LF
 SERIES | | | LEADFREE
 | | | 4 PIN A TYPE
 | | | BLACK
 | | | CLIP
 | | | 90°SMT
 | | | MALE

DESCRIPTION: USB A SMD Right Angle Type Plug