

SPECIFICATIONS

Electrical:



- 1.Current Rating: 1.5A / contact terminal
- 2.Voltage Rating: 30V DC
- 3.Contact Resistance: 30 milliohms Max
- 4.Dielectric Withstanding Voltage:
500 V AC AT Sec Level
- 5.Insulation Resistance: 1000 MEGA ohms Min

Mechanical:



- 1.Connector Mate and Unmate Force
Mate force: 3.75 kgf (Max)
Unmate force: 1.02 kgf (Min)
- 2.Terminal Retention: 1.2 kgf (Min)

Material:

- 1.Housing:
High Temperature Thermal Plastics,
UL 94V-0 , PBT / LCP , White / Black
 - 2.Contact: PHOSPHOR BRONZE
 - 3.Shell: PHOSPHOR BRONZE / SPCC
- Finish:**
- 1.Contact: Plated Gold in Mating Area;
Tin on Solder Balls
 - 2.Shell: Nickel Plating

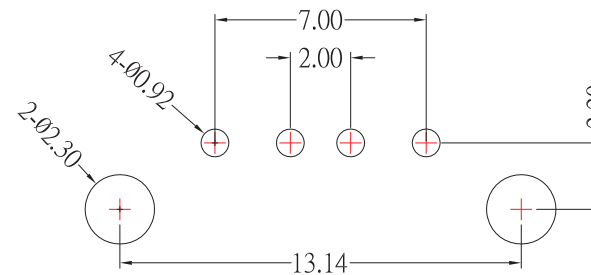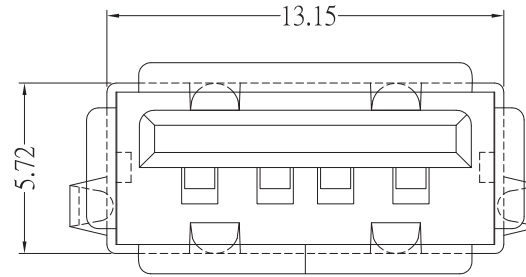

P.C.B LAYOUT MOUNTING PATTERN

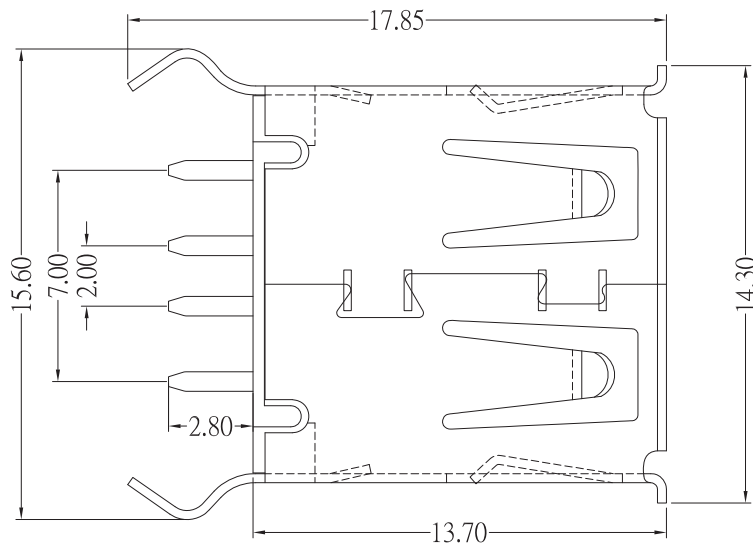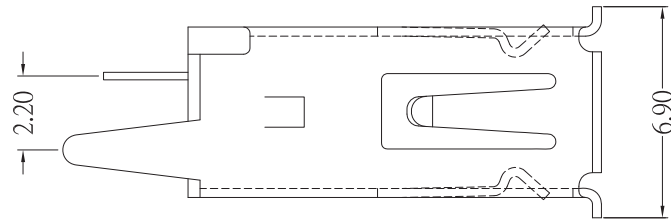

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE


SIZE A4

P PROJECTION

X, ±
.X ± 0.35
.XX ± 0.25
.XXX ± 0.15
ANG ± 3°

照片框

ORDER INFORMATION

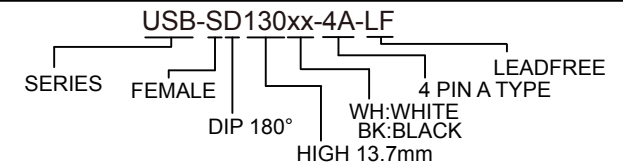

DESCRIPTION: