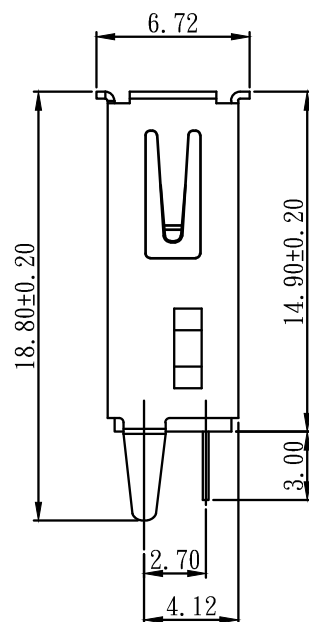
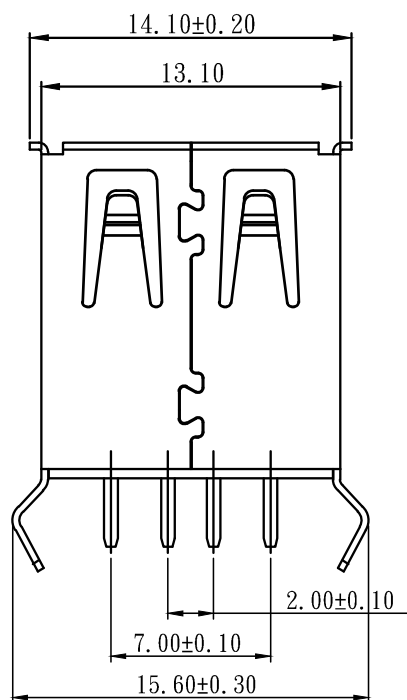
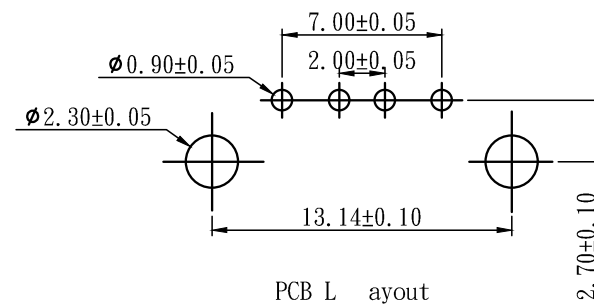
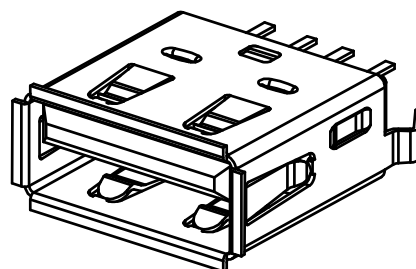
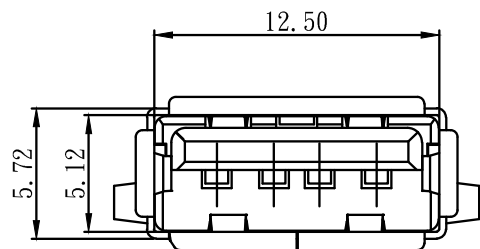


半成品尺寸管控图

Specifications:
 Rated current:1.5Amp
 Rated voltage:30V AC(RMS)>DC
 Contact Resistance:30m ohm. Max.
 Insulation Resistance:1,000M ohm. min.
 Withstanding Voltage:500V AC For One Minute
 Operating temperature:-55°C ~ +85°C
 Material And Finish
 Insulator:PBT UL94V-0
 Contact:Brass Bronze
 Plating:Gold Plated on Contact Area,
 Tin Plated on Solder Tail.
 Shell:Brass,Nickel Plated

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
 .X ± 0.25
 .XX ± 0.15
 .XXX ± 0.05
 ANG ±

PPOJECTION

照片框

ORDER INFORMATION

USB-SDBK-4A-LF
 SERIES LEADFREE
 4 PIN A TYPE
 BLACK
 DIP 180°
 FEMALE

DESCRIPTION: USB AF 180度彎腳捲邊