

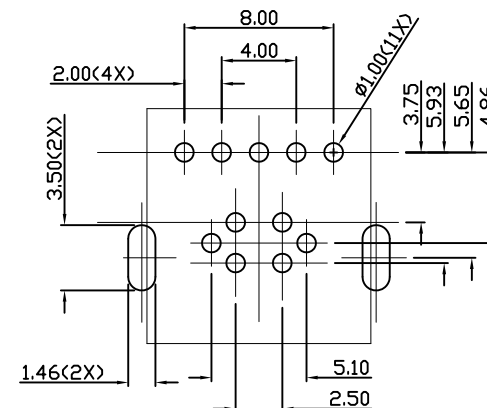

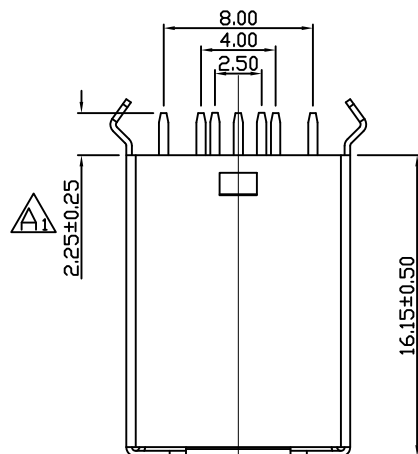



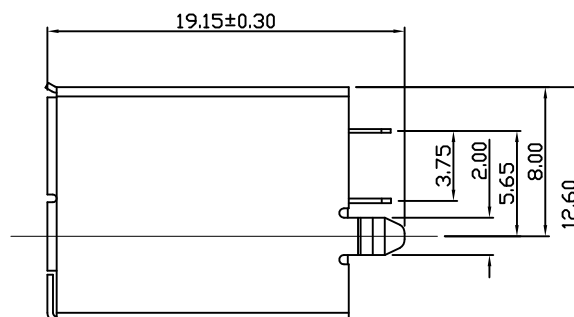

PCB LAYOUT

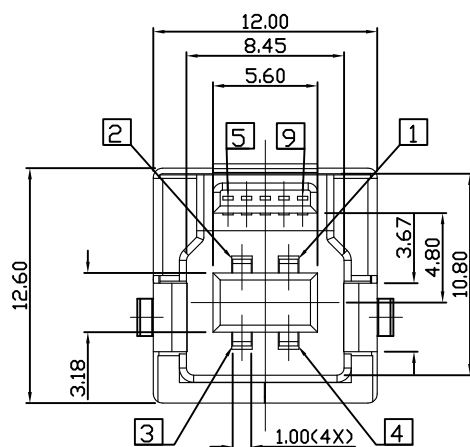

ELECTRICAL CHARACTERISTICS:
30V DC/AC 1A Max.
CONTACT RESISTANCE:
INSULATION RESISTANCE:
100M Ω Min.at 500V Ω DC.
DIELECTRIC STRENGTH:
750V AC/1 minute.
INSERTION FORCE:3.6kgf MAX
WITHDRAWAL:1.0kgf MIN

6	USB3.0-B母座立式-外殼	1	BRASS T=0.30mm FINISH:NICKEL	
5	USB3.0-B母座立式-后塞	1	High temp. thermoplastic UL 94V-0	
4	USB3.0-B母座立式-下座	1	High temp. thermoplastic UL 94V-0	
3	USB3.0-B母座立式-上座	1	High temp. thermoplastic UL 94V-0	
2	USB3.0-B母座立式-端子	4	PHOSPHOR BRONZE T=0.25mm SEE TABLE	
1	USB3.0-B母座立式-PIN 5	1	BRASS T=0.20mm SEE TABLE	
項次	品 名	數量	規 格	備注

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$



ORDER INFORMATION

USB-SDBL-9B-LF
SERIES | LEADFREE
BLUE
DIP 180°
FEMALE

DESCRIPTION: USB3.0-B母座立式