


Back View

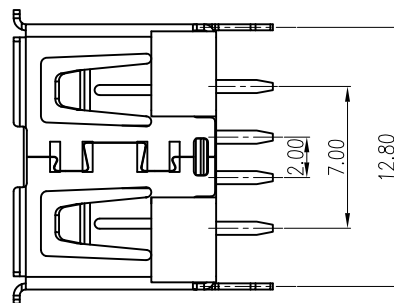


Note:


Specification:

1. Rated voltage and current: 1A Max.
2. Dielectric withstanding voltage: 30V(ac) for 1 minute.
3. Contact resistance: Before life test 30m ohm Max.
After life test 50m ohm max
4. Insulation resistance: 1000M ohm Min at DC 500V.
5. Insertion force: 35 Newtons Max.
6. Extraction force: 10 Newtons Min.
7. Solderability: Terminal shall be immersed in flux before text,
Then dip in molten solder for 5±0.5 sec. At 245±5°C
8. Temperature range: -55°C~+85°C


Top View

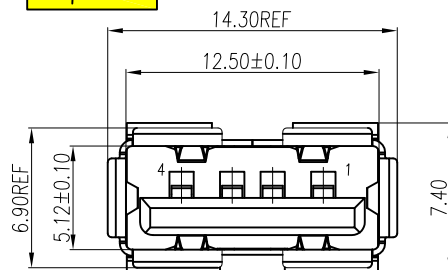


Side View



Bottom View




Front View

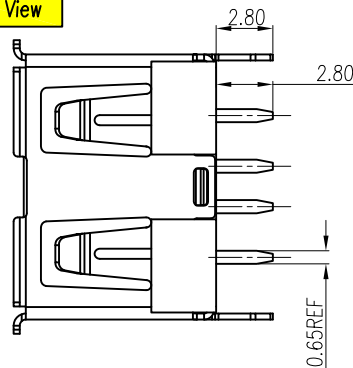

非金屬 Please don't care

Top View

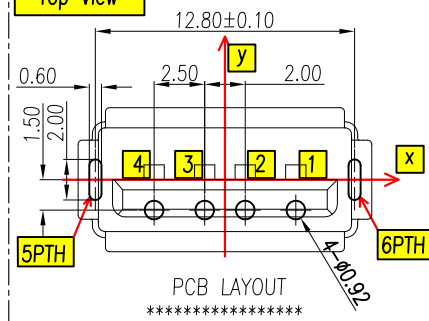

3	Shell	1	Brass/steel	T=0.30mm	80u"min Nickel Plated
2	Contact	4	copper alloy	T=0.25mm	Contact area:0.8u"min Gold Plated over 40u"Nickel min. Solder area:80u"min Tin Plated over 40u"Nickel min.
1	Housing	1	Thermoplastics	UL 94-V0	Black/White
No.	Name	Q'ty	Material	Remarks & Thickness	Finish

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ± 1°

照片框

ORDER INFORMATION

USB-SDZ2xx-4A-LF
SERIES
LEADFREE
4 PIN A TYPE
BK:BLACK
WH:WHITE
FEMALE CLIP
DIP 180°

DESCRIPTION: USB-A(F) 180° DIP(魚叉型)(10mm)