

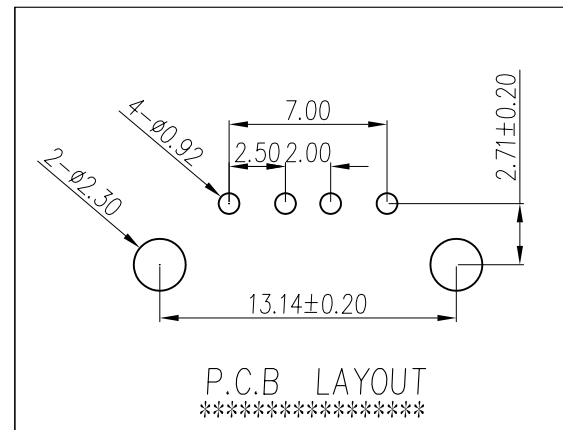
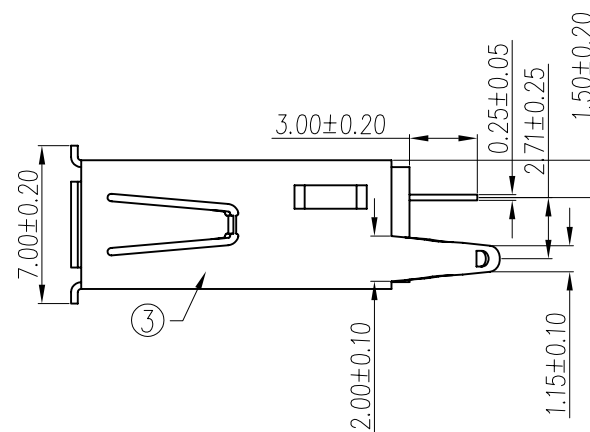


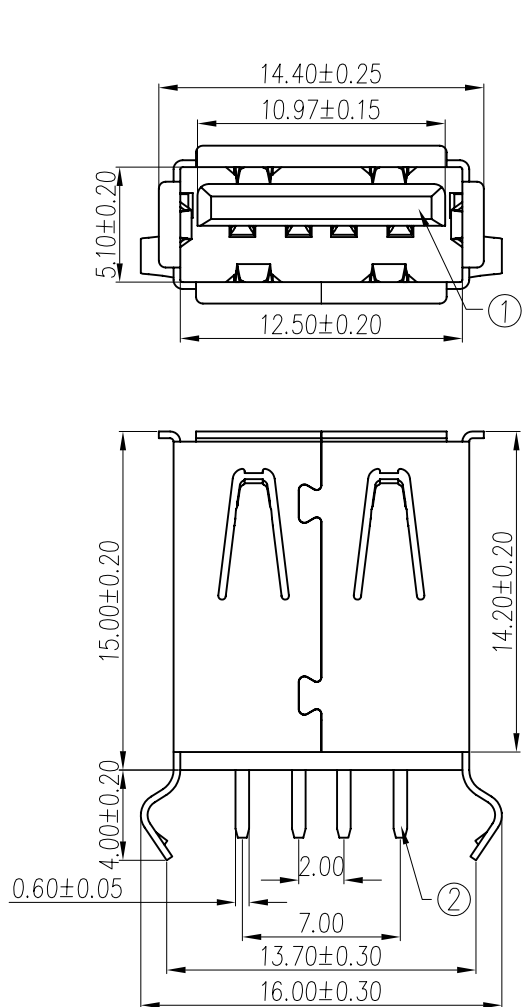

Note:

1. Rated voltage and current: 1.5A at 250V AC minimum.
2. Dielectric withstanding voltage: 500V AC/1 minute without breakdown.
3. Contact resistance: Before life test 30m ohm max, After life test 50m ohm max.
4. Insulation resistance: 1000M ohm min.
5. Insertion force: 35 Newtons maximum.
6. Extraction force: 10 Newtons minimum.
7. Solderability: Terminal shall be immersed in flux before text, Then dip in molten solder for 5±0.5 sec. At 245±5°C.



| 3   | Shell   | 1    | Brass    | T=0.30mm            | 80~120u"Nickel Plated                                                                                           |
|-----|---------|------|----------|---------------------|-----------------------------------------------------------------------------------------------------------------|
| 2   | Contact | 4    | Brass    | T=0.25mm            | Contact area: 0.8~1.2u"Gold Plated over 40u"Nickel min.<br>Solder area: 80~120u"Tin Plated over 40u"Nickel min. |
| 1   | Housing | 1    | P.B.T    | UL 94-V0            | Black/Ivory                                                                                                     |
| No. | Name    | Q'ty | Material | Remarks & Thickness | Finish                                                                                                          |

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±

照片框

ORDER INFORMATION

USB-SDxx-4A-LF  
SERIES | LEADFREE  
4 PIN A TYPE  
BK:BLACK  
WH:WHITE  
DIP 180°  
FEMALE

DESCRIPTION: USB-A TYPE P.C.B(F)180°