
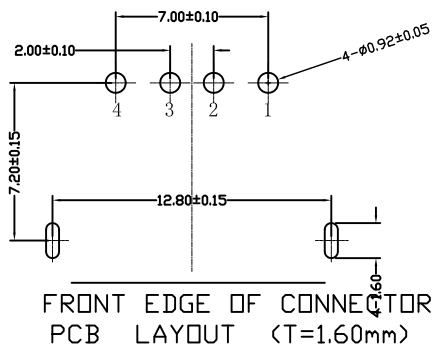

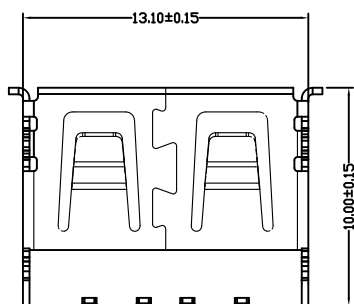
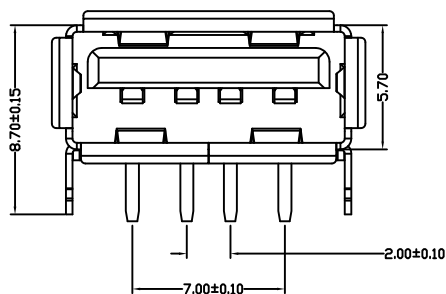




NOTES:

1. HOUSING: SEE NOTES, UL94V-0 .
- TERMINAL: SEE NOTES.
- SHELL: SEE NOTES.

SPECIFICATION :

1. ELECTRICAL CHARACTERISTIC:
 - CONTACT RESISTANCE: 30MΩ MAX
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1MIN
 - INSULATION RESISTANCE: 1000MΩ MIN
2. MECHANICAL CHARACTERISTIC:
 - INSERTION FORCE: 35N(3.57KGF) MAX
 - EXTRACTION FORCE: 10~35N(1.02~3.57KGF)MIN
 - DURABILITY: 1500 CYCLES EXTRACTION FORCE: 10~35N
5000 CYCLES MIN
5000 CYCLES EXTRACTION

FORCE: 3~35N

3. ENVIRONMENTAL:

OPERATING TEMPERATURE: -55℃+85℃

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.20
.XX ± 0.15
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

USB-SR101BK-4A-LF
SERIES | LEADFREE
4 PIN A TYPE
BLACK
LONG 10.0mm
FEMALE | DIP 90°

DESCRIPTION: USB A/F 10.0 D 款 前两脚 有卷边 一字型